Technical Guidelines
Steps

General note

A wide range of options are available for building a Techo-Bloc staircase. The riser may have different heights, depending on the model of block chosen. Quarry Stone, Mini-Creta, Escala or Suprema could be used for the riser. The Aged cap, Antique Step 14", Prima 14" cap, or the Escala cap are used for the step and secured through concrete adhesive.

Installation outline

01 INSTALLATION OF THE RISER

Install the riser with the block model selected. For some models (e.g., Mini-Creta 3"), you will need to install two rows when building a riser. In this case, make sure you use the connectors in the right position. Fill in and compact behind the riser with crushed stone.

02 INSTALLATION OF STEP

Install the step modules on top of the riser row.

Stagger the joints between the riser and step.
The step modules must be secured to the riser modules with concrete adhesive.

03 INSTALLATION OF ADDITIONAL ROWS

Repeat steps 1 and 2.

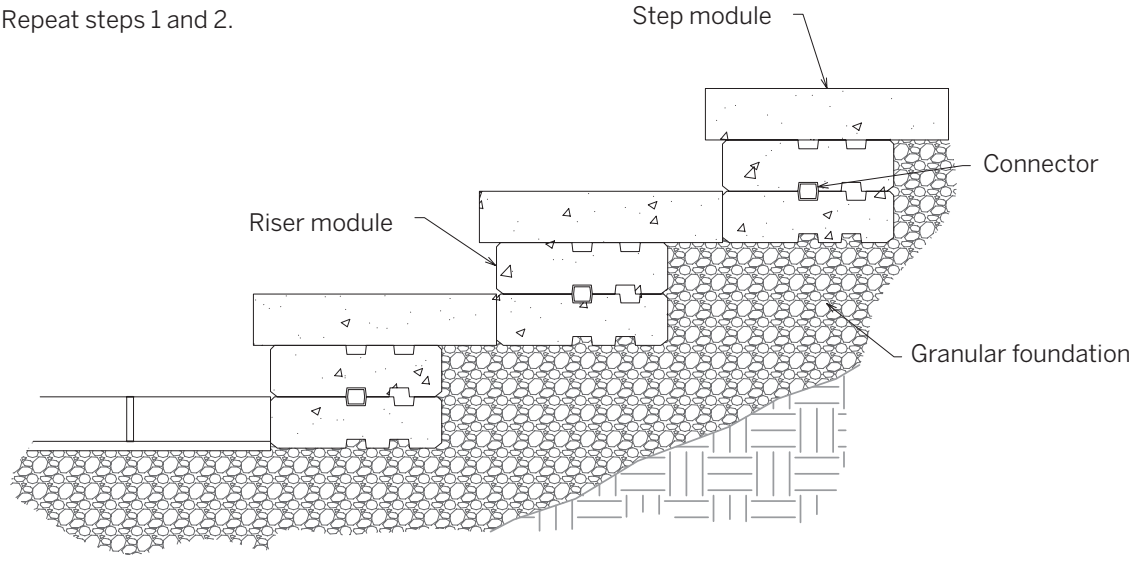

Step installation
Typical cross section

Antique Step 14"

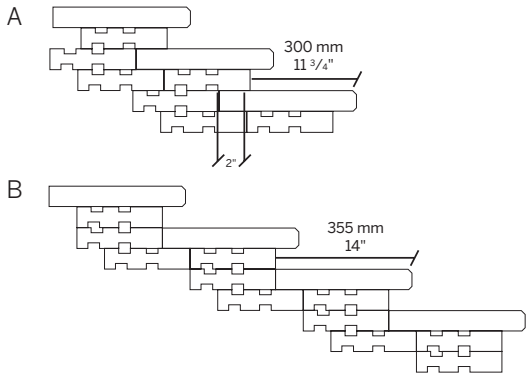

Escala

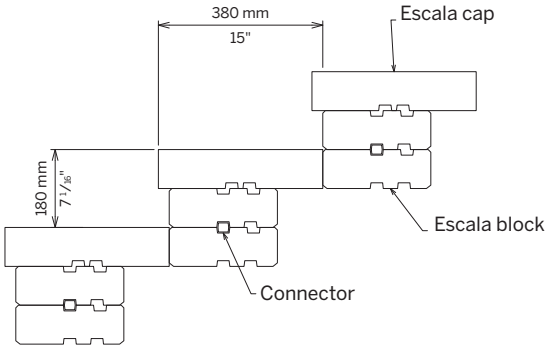

Mini-Creta 3"

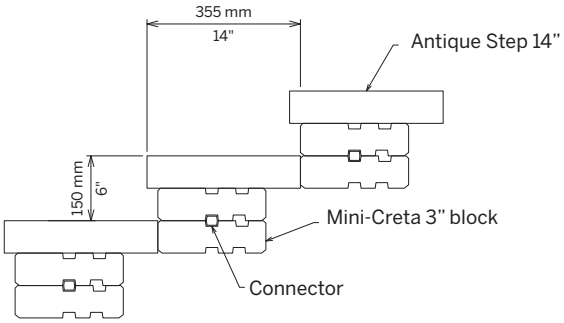

Mini-Creta 6"

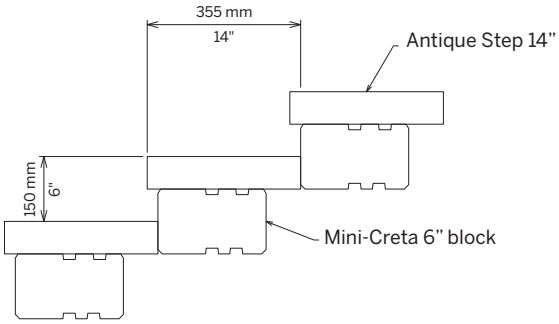

Quarry Stone 100 mm

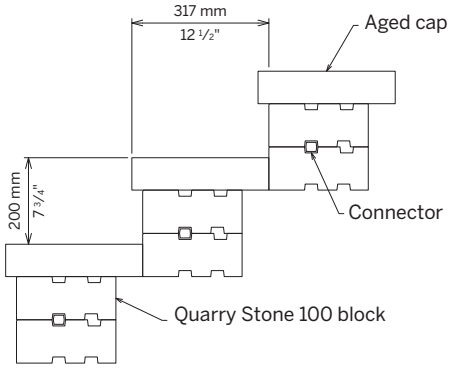

Quarry Stone 200 mm

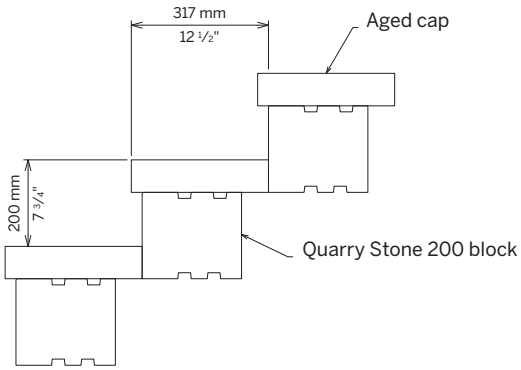
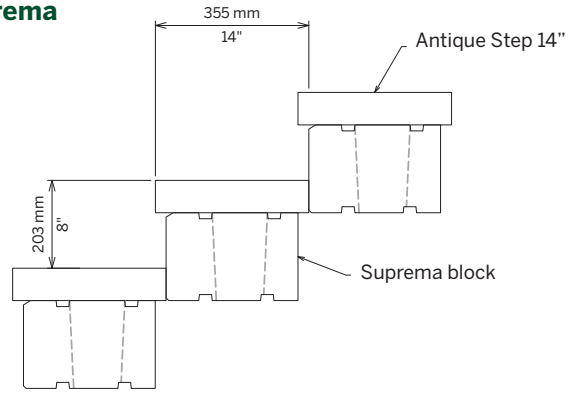
Suprema