



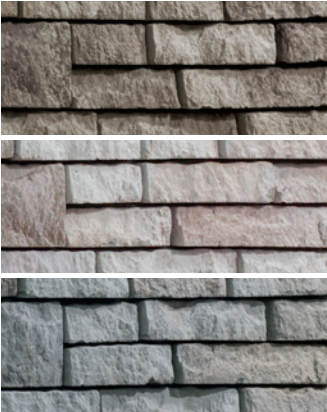

PRESCOTT 2.25"


DESCRIPTION: Wall double-sided TEXTURE: Chiseled Face

Pallet Overview



Chiseled Face
Rock Garden Brown
Chiseled Face
Victoria
Chiseled Face
Riviera

Specifications per pallet

		Imperial	Metric
A 	Dimension Front (L x D x H) A	9 x 9 13⁄16 x 2 1⁄4	229 x 250 x 57
	Dimension Back (L x D x H) A	7 7⁄16 x 9 13⁄16 x 2 1⁄4	189 x 250 x 57
	Dimension Front (L x D x H) B	12 x 9 13⁄16 x 2 1⁄4	305 x 250 x 57
	Dimension Back (L x D x H) B	10 7⁄16 x 9 13⁄16 x 2 1⁄4	265 x 250 x 57
B 	Dimension Front (L x D x H) C	15 x 9 13⁄16 x 2 1⁄4	381 x 250 x 57
	Dimension Back (L x D x H) C	13 7⁄16 x 9 13⁄16 x 2 1⁄4	341 x 250 x 57
	Cubing	27 ft²	2.51 m²
		144 lin. ft	43.89 lin. m
C 	Approx. Weight	2 661 lbs	1 207 kg
	Minimum radius	5.2 ft	1.6 m
	Number of rows	12	
	Coverage per row	2.25 ft²	0.21 m²
	Lin. coverage per row	12 lin. ft	3.66 lin. m

NOTES

See page 6 for icons description.

COMPATIBLE CAPS

See page 145 for product compatibility.

When building a double-sided wall one pallet will cover an average of 25.23 ft².

*For an authentic look, each color option is composed of a variety of darker & lighter tones. Natural ingredients such as granite are present within the recipe to allow for a range in tones, veining and textures from one stone to another.

The dimensional tolerance for Stonedge wet cast retaining wall units is: ± 3⁄16" (5 mm) for height and ± 1⁄2" (13 mm) for length and width. During the installation, the level between adjacent wall units will vary (usually more than for a dry cast wall unit) in order to obtain a more realistic appearance of a natural stone wall.


See page 146 to 161 for more technical information.



PRESCOTT 4.5"

DESCRIPTION: Wall double-sided TEXTURE: Chiseled Face

Specifications per pallet		Imperial	Metric
A 	Dimension Front (L x D x H) A	9 x 9 13⁄16 x 4 1⁄2	229 x 250 x 114
	Dimension Back (L x D x H) A	7 7⁄16 x 9 13⁄16 x 4 1⁄2	189 x 250 x 114
	Dimension Front (L x D x H) B	12 x 9 13⁄16 x 4 1⁄2	305 x 250 x 114
B 	Dimension Back (L x D x H) B	10 7⁄16 x 9 13⁄16 x 4 1⁄2	265 x 250 x 114
	Dimension Front (L x D x H) C	15 x 9 13⁄16 x 4 1⁄2	381 x 250 x 114
	Dimension Back (L x D x H) C	13 7⁄16 x 9 13⁄16 x 4 1⁄2	341 x 250 x 114
C 	Cubing	27 ft²	2.51 m²
		72 lin. ft	21.95 lin. m
	Approx. Weight	2 728 lbs	1 237 kg
	Minimum radius	5.2 ft	1.6 m
	Number of rows	6	
	Coverage per row	4.50 ft²	0.42 m²
	Lin. coverage per row	12 lin. ft	3.66 lin. m

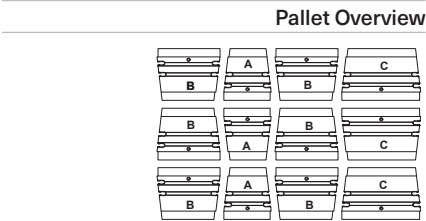


Rock Garden Brown

Chiseled Face




Victoria

Chiseled Face



Riviera

Chiseled Face



NOTES

See page 6 for icons description.

COMPATIBLE CAPS

See page 145 for product compatibility.

When building a double-sided wall one pallet will cover an average of 25.23 ft².

*For an authentic look, each color option is composed of a variety of darker & lighter tones. Natural ingredients such as granite are present within the recipe to allow for a range in tones, veining and textures from one stone to another.

The dimensional tolerance for Stonedge wet cast retaining wall units is: ± 3⁄16" (5 mm) for height and ± 1⁄2" (13 mm) for length and width. During the installation, the level between adjacent wall units will vary (usually more than for a dry cast wall unit) in order to obtain a more realistic appearance of a natural stone wall.


See page 146 to 161 for more technical information.



PRESCOTT

DESCRIPTION: Corners and pillars TEXTURE: Chiseled Face

Pallet Overview



Chiseled Face
Rock Garden Brown
Chiseled Face
Victoria
Chiseled Face
Riviera

2.25"			
Specifications per pallet		Imperial	Metric
	Product dimension (L × D × H)	14 3⁄16 × 9 13⁄16 × 2 1⁄4	360 × 250 × 57
	Cubing	72 units	72 units
	Approx. Weight	1 789 lbs	811 kg
	Number of rows	8	
72 units / pallet	Pillar height	40 1⁄2 in	1 029 mm

4.5"			
Specifications per pallet		Imperial	Metric
	Product dimension (L × D × H)	14 3⁄16 × 9 13⁄16 × 4 1⁄2	360 × 250 × 114
	Cubing	36 units	36 units
	Approx. Weight	1 871 lbs	849 kg
	Number of rows	4	
36 units / pallet	Pillar height	40 1⁄2 in	1 029 mm

NOTES

See page 6 for icons description.

COMPATIBLE CAPS

See page 145 for product compatibility.

*For an authentic look, each color option is composed of a variety of darker & lighter tones. Natural ingredients such as granite are present within the recipe to allow for a range in tones, veining and textures from one stone to another.


The dimensional tolerance for Stonedge wet cast retaining wall units is: ± 3⁄16" (5 mm) for height and ± 1⁄2" (13 mm) for length and width. During the installation, the level between adjacent wall units will vary (usually more than for a dry cast wall unit) in order to obtain a more realistic appearance of a natural stone wall.

See page 146 to 161 for more technical information.


RETAINING WALLS - PRESCOTT

The different modules of the Prescott retaining wall allow the installation of different block combinations.

Eight combinations are shown as an example. Each combination is 24" (610 mm) long and 6 3/4" (171 mm) high.

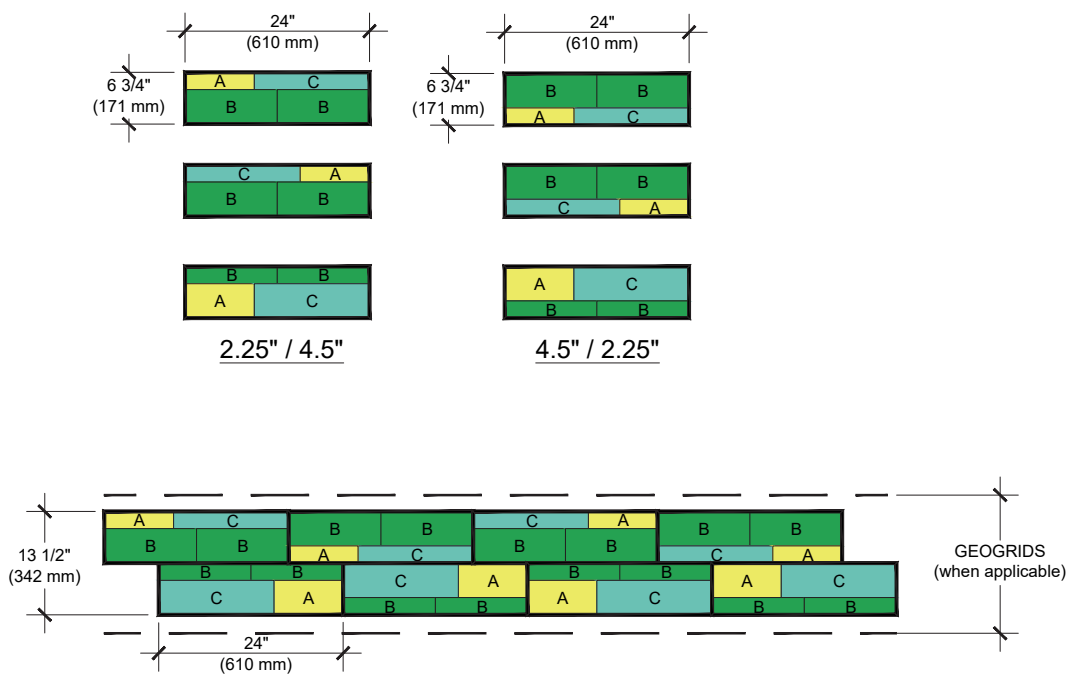


NUMBER OF BLOCKS REQUIRED	MODULE		
	A	B	C
PRESCOTT			
33% of the surface - Prescott 2.25"	4	8	8
67% of the surface - Prescott 4.5"	2	8	2

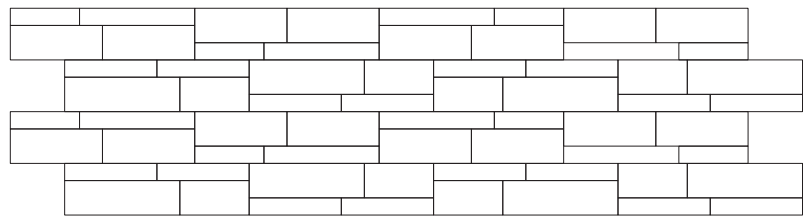


INSTALLATION GUIDE


FREESTANDING WALLS - PRESCOTT 2.25" & 4.5"

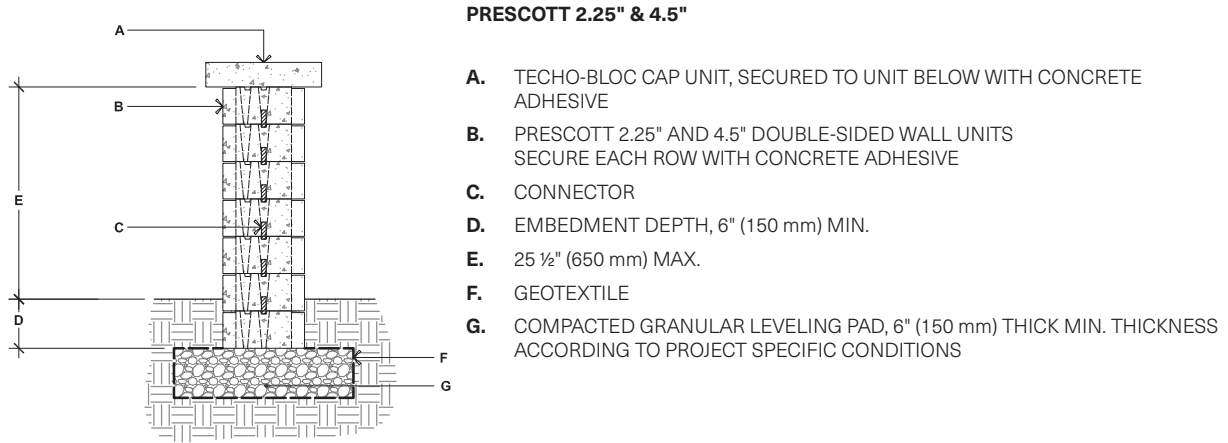

90° CORNER OF A DOUBLE-SIDED WALL

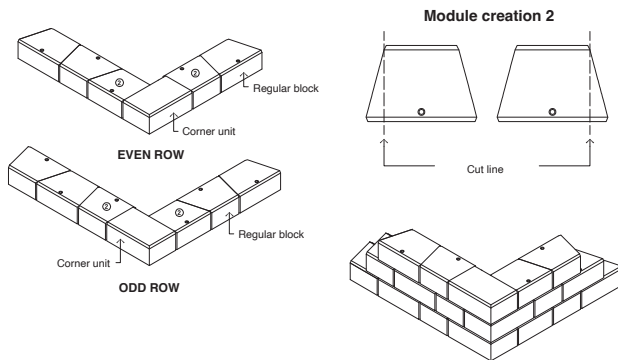

DOUBLE-SIDED WALL - END OF A STRAIGHT WALL

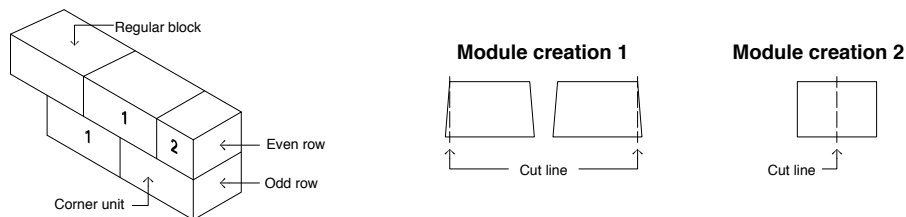


GENERAL NOTES

1. Alternate odd and even rows.
2. Stagger joints from one row to the next.
3. Glue all modules at each row with concrete adhesive.
4. Cavities, grooves and connectors are not illustrated to avoid overloading the image.


INSTALLATION GUIDE

DOUBLE-SIDED WALL RADIUS - PRESCOTT 2.25" & 4.5"

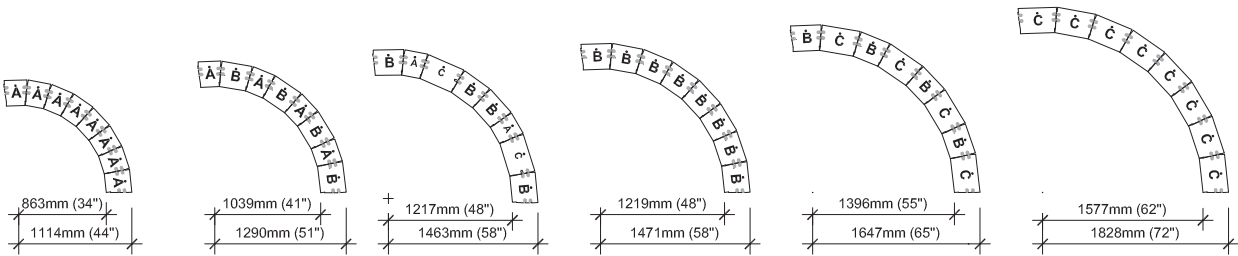

It is the user's responsibility to verify for the quantity of materials required.

STEPS

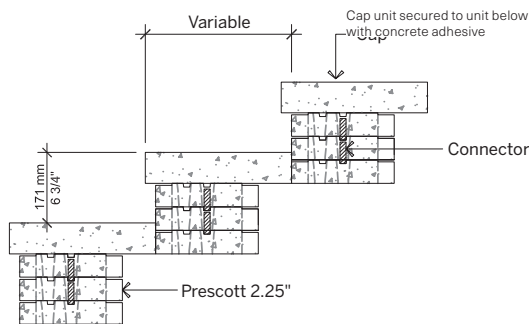


For all possible combinations of pillars and caps, please refer to the correspondence table on page 145

Check with your local Building Codes to determine any restrictions or guidelines regarding the dimensions of steps (including riser height and step tread) as well as handrail specifications.


INSTALLATION GUIDE

PILLARS - PRESCOTT 2.25" & 4.5"

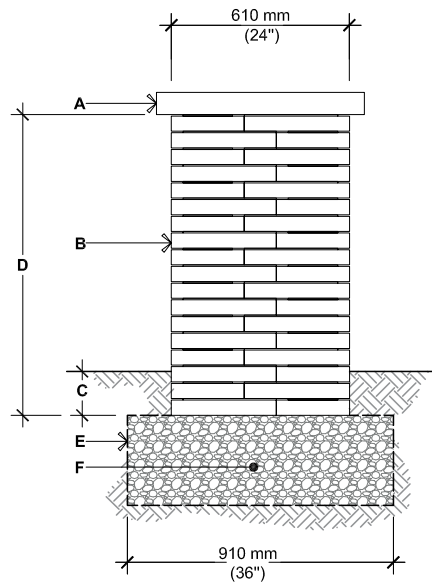


PRESCOTT 2.25"

- A.** PILLAR CAP UNIT
(SECURE WITH CONCRETE ADHESIVE)
- B.** PRESCOTT 2.25" PILLAR UNIT SECURE EACH ROW WITH CONCRETE ADHESIVE
- C.** EMBEDMENT DEPTH, 6" (150 mm) MIN.
- D.** 40 1/2" (1 029 mm), HEIGHT PER PALLET
45" (1 143 mm), MAX. HEIGHT
- E.** GEOTEXTILE
- F.** COMPACTED GRANULAR BASE 6" (150 mm) THICK MIN. THICKNESS ACCORDING TO PROJECT SPECIFIC CONDITIONS

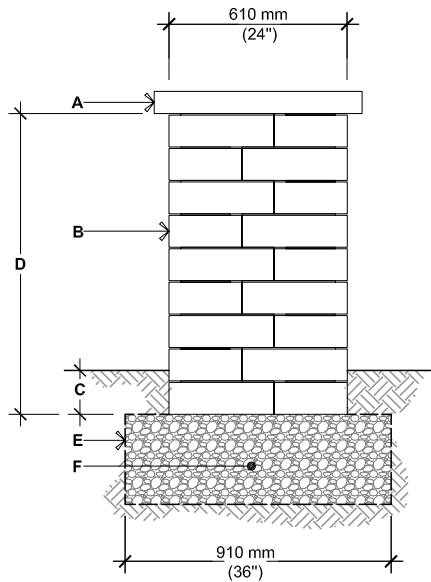

PRESCOTT 4.5"


- A.** PILLAR CAP UNIT
(SECURE WITH CONCRETE ADHESIVE)
- B.** PRESCOTT 4.5" PILLAR UNIT SECURE EACH ROW WITH CONCRETE ADHESIVE
- C.** EMBEDMENT DEPTH, 6" (150 mm) MIN.
- D.** 40 1/2" (1 029 mm), HEIGHT PER PALLET
45" (1 143 mm), MAX. HEIGHT
- E.** GEOTEXTILE
- F.** COMPACTED GRANULAR BASE 6" (150 mm) THICK MIN. THICKNESS ACCORDING TO PROJECT SPECIFIC CONDITIONS

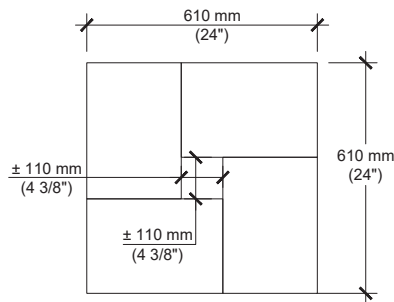

For all possible combinations of pillars and caps, please refer to the correspondence table on page 145

INSTALLATION GUIDE


PILLARS - PRESCOTT 2.25" & 4.5"

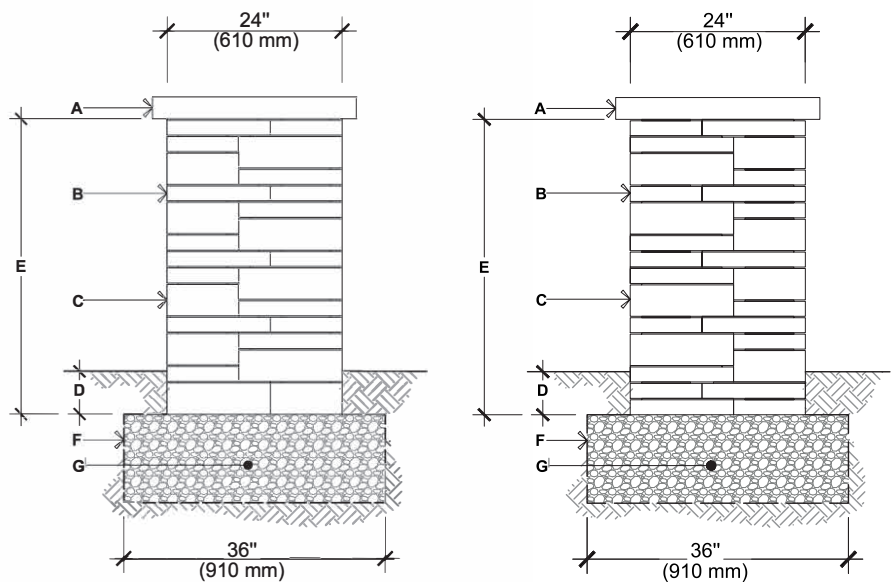

- PRESCOTT 2.25" & 4.5"**
OPTION A
- A. PILLAR CAP UNIT (SECURE WITH CONCRETE ADHESIVE)
 - B. PRESCOTT 2.25" PILLAR UNIT SECURE EACH ROW WITH CONCRETE ADHESIVE
 - C. PRESCOTT 4.5" PILLAR UNIT SECURE EACH ROW WITH CONCRETE ADHESIVE
 - D. EMBEDMENT DEPTH, 6" (150 mm) MIN.
 - E. 40 1/2" (1 029 mm) 45" (1 143 mm), MAX. HEIGHT
 - F. GEOTEXTILE
 - G. COMPACTED GRANULAR BASE 6" (150 mm) THICK MIN. THICKNESS ACCORDING TO PROJECT SPECIFIC CONDITIONS

- PRESCOTT 2.25" & 4.5"**
OPTION B
- A. PILLAR CAP UNIT (SECURE WITH CONCRETE ADHESIVE)
 - B. PRESCOTT 2.25" PILLAR UNIT SECURE EACH ROW WITH CONCRETE ADHESIVE
 - C. PRESCOTT 4.5" PILLAR UNIT SECURE EACH ROW WITH CONCRETE ADHESIVE
 - D. EMBEDMENT DEPTH, 6" (150 mm) MIN.
 - E. 40 1/2" (1 029 mm) 45" (1 143 mm), MAX. HEIGHT
 - F. GEOTEXTILE
 - G. COMPACTED GRANULAR BASE 6" (150 mm) THICK MIN. THICKNESS ACCORDING TO PROJECT SPECIFIC CONDITIONS

NOTE: Two pillars of 40 1/2" total height (one option A and one option B) required one pallet of Prescott 4.5" Pillar unit and one pallet of Prescott 2.25" Pillar unit.

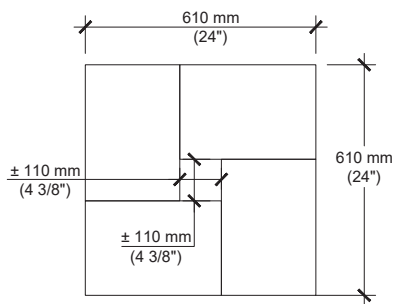

For all possible combinations of pillars and caps, please refer to the correspondence table on page 145