


BLU 80 mm (6"×13")

DESCRIPTION: Paver TEXTURE: Smooth, HD² Smooth

Specifications per pallet		Imperial	Metric
 144 units / pallet	Product dimension (L×W×H)	6 ½ × 13 × 3 ⅛	165 × 330 × 80
	Cubing	84.40 ft²	7.84 m²
	Approx. Weight	3 133 lbs	1 421 kg
	Number of rows	8	
	Coverage per row	10.55 ft²	0.98 m²
	Lin. coverage per row	Depth 19.49 lin. ft Length 9.74 lin. ft	5.94 lin. m

Pallet Overview					

Laying Patterns Options

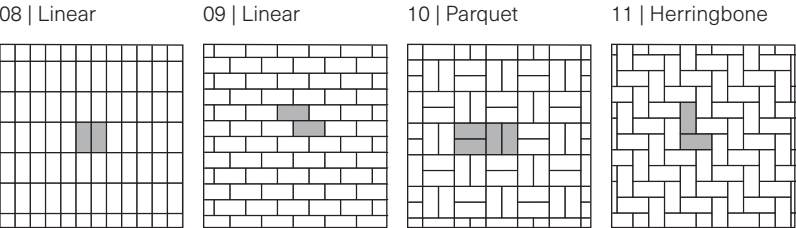

Patterns are for design inspiration only. The installer is responsible to calculate & purchase the correct amount of material.

NOTES

See page 6 for icons description.
See page 27 for more information about applications.
See page 62 to 64 for more technical information. When used in a permeable pavement application, see page 100 to 105 for more technical information.

JOINT WIDTH: ⅜" (7 mm)
% OF SURFACE OPENING: 4.8%
INFILTRATION RATE: 570 in./hr (14 475 mm/hr)
Please note that for barefoot walking areas (e.g. pool deck) dark-colored paving units could get very hot under the sun.

