





BLU 80 mm


DESCRIPTION: Paver TEXTURE: Slate and HD² Slate



Specifications per pallet		Imperial	Metric
A 	Product dimension (L × W × H) A	6 ½ × 13 × 3 ⅛	165 × 330 × 80
	Product dimension (L × W × H) B	13 × 13 × 3 ⅛	330 × 330 × 80
	Product dimension (L × W × H) C	19 ½ × 13 × 3 ⅛	495 × 330 × 80
B 	Cubing	84.96 ft ²	7.90 m ²
	Approx. Weight	3 246 lbs	1 472 kg
	Number of rows	8	
C 	Coverage per row	10.62 ft ²	0.99 m ²
	Lin. coverage per row	9.75 lin. ft	2.97 lin. m

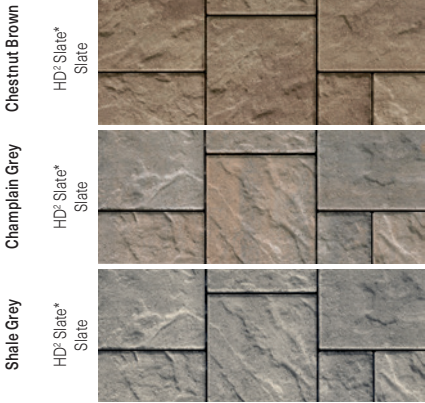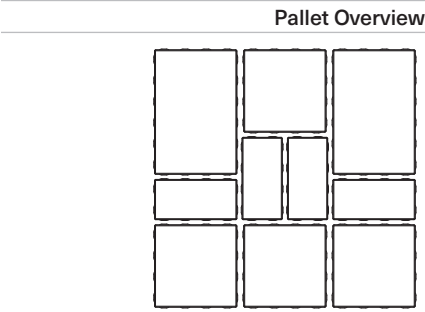

Laying Patterns Options

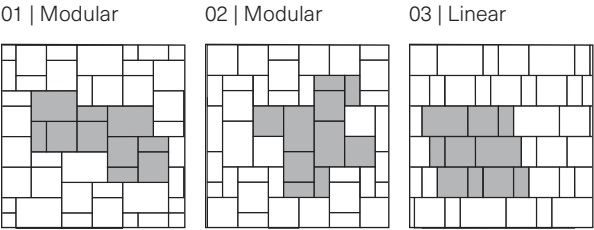

Patterns are for design inspiration only. The installer is responsible to calculate & purchase the correct amount of material.

NOTES

See page 6 for icons description.

See page 27 for more information about applications.

See page 62 to 64 for more technical information. When used in a permeable pavement application, see page 100 to 105 for more technical information.

*HD² Slate is only available in USA.

JOINT WIDTH: ½" (7 mm)

% OF SURFACE OPENING: 4.5%**

INFILTRATION RATE: 570 in./hr (14 475 mm/hr)

**For permeable application, the installation should be combined with Blu 6 × 13 in a modular pattern. A min. of 4.5% opening surface requires 75% of Blu 6 × 13 and 25% of Blu.

Please note that for barefoot walking areas (e.g. pool deck) dark-colored paving units could get very hot under the sun.