




# INDUSTRIA SLAB

**DESCRIPTION:** Slab **TEXTURE:** HD<sup>2</sup> Smooth , HD<sup>2</sup> Granitex or HD<sup>2</sup> Polished

## PALLET OVERVIEW



### EXPANDING DESIGN HORIZONS WITH LIVEABLE ROOFTOPS.

#### COOL ROOF

High Solar Reflectivity

#### LENGTHENS ROOF LIFE SPAN

Protects the waterproofing membrane from UV rays and accidental perforations.

#### EASY ACCESS FOR MAINTENANCE

When installed on pedestals, INDUSTRIA slab can be moved for roof system maintenance.

#### NOTES

See page 35 to 37 for more technical information.

See page 29 for more information about applications.

HD<sup>2</sup> Polished and HD<sup>2</sup> Granitex is made-to-order, minimum order of 500 sq. ft. Deposit required.

Allowable load Capacity of slab on pedestal set (including a safety factor of 2): 1441 lb (653 kg)

Specifications per pallet		Imperial	Metric
Smooth and Granitex	Cubing	<b>54.25 ft<sup>2</sup></b>	5.04 m <sup>2</sup>
	Approx. Weight	1 567 lbs	711 kg
	Number of rows	7	
	Coverage per row	7.75 ft <sup>2</sup>	0.72 m <sup>2</sup>
	Linear coverage per row	3.94 lin. ft	1.20 lin. m


	Unit dimensions		in	mm	Units/pallet
	Height	2 3/8	60	14 units	
	Width	23 5/8	600		
	Length	23 5/8	600		

Specifications per pallet		Imperial	Metric
Polished	Cubing	<b>54.25 ft<sup>2</sup></b>	5.04 m <sup>2</sup>
	Approx. Weight	1 555 lbs	705 kg
	Number of rows	7	
	Coverage per row	7.75 ft <sup>2</sup>	0.72 m <sup>2</sup>
Linear coverage per row	3.94 lin. ft	1.20 lin. m	


	Unit dimensions		in	mm	Units/pallet
	Height	2 5/16	58	14 units	
	Width	23 5/8	600		
	Length	23 5/8	600		

Chestnut Brown    Beige Cream    Greyed Nickel    Shale Grey    Onyx Black


HD<sup>2</sup> Polished

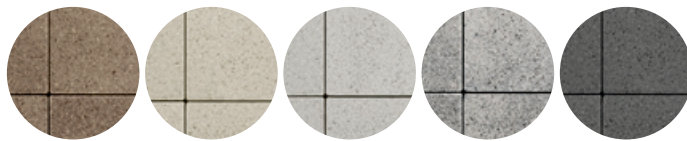


HD<sup>2</sup> Smooth

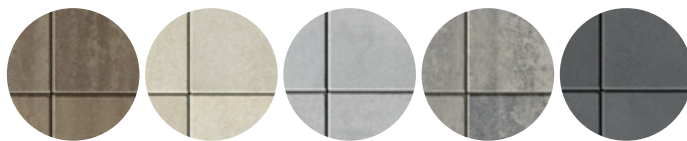


HD<sup>2</sup> Granitex

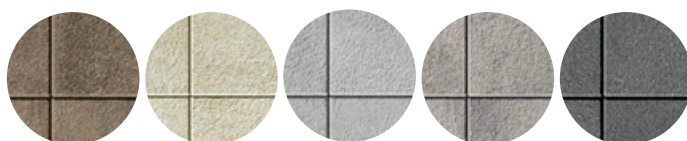

29 | Linear pattern



30 | Linear pattern



Patterns are for design inspiration only. The installer is responsible to calculate & purchase the correct amount of material.