



VILLAGIO


DESCRIPTION: Paver TEXTURE: Beveled



Specifications per pallet		Imperial	Metric
A  77 units / pallet	Product dimension (L x W x H)	A 5 1⁄8 x 5 1⁄8 x 2 3⁄8	130 x 130 x 60
	Product dimension (L x W x H)	B 6 5⁄16 x 5 1⁄8 x 2 3⁄8	160 x 130 x 60
	Product dimension (L x W x H)	C 7 5⁄16 x 5 1⁄8 x 2 3⁄8	185 x 130 x 60
B  77 units / pallet	Product dimension (L x W x H)	D 8 7⁄16 x 5 1⁄8 x 2 3⁄8	215 x 130 x 60
	Cubing	117 ft²	10.88 m²
C  154 units / pallet	Approx. Weight	2 960 lbs	1 342 kg
	Number of rows	11	
D  154 units / pallet	Coverage per row	10.64 ft²	0.99 m²
	Lin. coverage per row	24.94 lin. ft	7.61 lin. m

Pallet Overview											
D	C	B	A	C	D	D	C	B	A	C	D
D	C	B	A	C	D	D	C	B	A	C	D
D	C	B	A	C	D	D	C	B	A	C	D
D	C	B	A	C	D	D	C	B	A	C	D
D	C	B	A	C	D	D	C	B	A	C	D
D	C	B	A	C	D	D	C	B	A	C	D
D	C	B	A	C	D	D	C	B	A	C	D

Laying Patterns Options

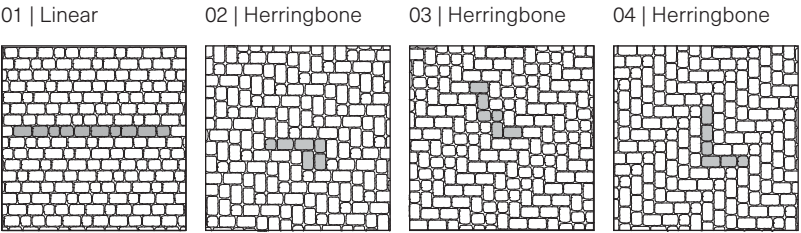

Patterns are for design inspiration only. The installer is responsible to calculate & purchase the correct amount of material.

NOTES

See page 6 for icons description.
See page 27 for more information about applications.
See page 62 to 64 for more technical information. When used in a permeable pavement application, see page 100 to 105 for more technical information.

JOINT WIDTH: 3⁄8" to 9⁄16" (9 to 15 mm)
% OF SURFACE OPENING: 8.0 %
INFILTRATION RATE: 896 in./hr (22 750 mm/hr)

The Villagio paver allows for gentle curves and winding pathways, eliminating the need for cuts.

Please note that for barefoot walking areas (e.g. pool deck) dark-colored paving units could get very hot under the sun.

