

PRESCOTT

DESCRIPTION: Fire pit **TEXTURE:** Natural stone



Sold as a kit not pre-assembled. Piedimonte caps included.

Techo-Bloc is not responsible for any damages to the firepit if it is not installed with a sleeve or accessory kit. The firepit is not designed for large fires. Fire should be contained at least 6" away from the firepit wall blocks. Overheating could lead to heat damage to the firepit components.

*For an authentic look, each color option is composed of a variety of darker & lighter tones. Natural ingredients such as granite are present within the recipe to allow for a range in tones, veining and textures from one stone to another.

CAP

OPTIONS AND ACCESORIES ARE SOLD SEPARATELY.

See 112 for more technical information.



FIRE PIT










Specifications per pallet	Imperial	Metric
Approx. Weight	2 813 lbs	1276 kg
Height	18 in	457 mm
Depth	51 ¾ in	1 314 mm
Length	51 ¾ in	1 314 mm
Piedimonte caps	6	
Prescott 2,25″ block	7 A, 18 B, 7 C	
Prescott 4,5″ block	3 A, 6 B, 3 C	
Prescott 2,25" corner block	16	
Prescott 4,5" corner block	6	

Options and accesories (sold separately)

Sleeve Insert







HPC Burners and Breeo Accessories (sold separately)


HPC Burners

Features:

Natural Gas or Liquid Propane Standard BTU: 65K Push button ignition

Includes:

Stainless steel burner with aluminum pan, mounting brackets, Dante valve with push-button ignition, vents, lava rock and stainless steel cover. See page 117 for details.



Grilling System Outpost ™

Only for Smokeless inserts




Weight: 12 lbs. 9 oz.

Diameter: 22 inches See page 118 for details.


INSTALLATION GUIDE


PRESCOTT FIRE PIT (KIT)




1302 mm (51 1/4") ELEVATION A ELEVATION B

TOP







SECTION 1-1

- STEEL BOX INSERT A.
- CLEAN STONE 3/4" (20 MM), 4"(100 MM)THICK B.
- C. PIEDIMONTE CAP (CUT)
- PRESCOTT 4.5" BLOCK D.
- E. PRESCOTT 2.25" BLOCK
- TECHO-BLOC PAVERS OR SLABS F.
- G. SETTING BED 1" (25 MM)
- H. COMPACTED GRANULAR BASE 0-3/4" (0-20 MM (SEE TABLE PAGE 56 FOR THICKNESS)
- PRESCOTT 4.5" CORNER BLOCK I.
- PRESCOTT 2.25 CORNER BLOCK J.

QUANTITY OF MATERIALS REQUIRED

- Piedimonte cap: 6
- Prescott 2.25"block: **7** A , **18** B , **7** C
- Prescott 4.5"block: **3** A , **6** B , **3** C
- Prescott 2.25" corner block: 16
- Prescott 4.5" corner block: 6

NOTE: Secure the blocks using a heat resistant concrete adhesive. The installer must ensure that the installation and use of the firepit comply with local regulations and code requirements.



RECOMMENDED LOCATION FOR VENT ACCESSORY (GAS KIT);



RECOMMENDED LOCATION FOR IGNITION CONTROL (GAS KIT);

Consult our Installation Guide in our website for a detailed step by step installation.

INSTALLATION GUIDE

HPC BURNERS FOR FIRE PITS

DESCRIPTION

Made for outdoor gas fire pits (natural or propane), the patented design of the Torpedo™ burner by HPC delivers the biggest CSA-certified flame on the market. Made of welded commercial-grade stainless steel, this burner seamlessly blends into any fire pit design.

WHAT COMES IN THE HPC BURNER BOX?

Valencia units: burner and connection valve, accessories, owners manual, spark igniter kit, vent covers, key valve bracket, 5 install collars and a cover, 65k orifice installed, 150k orifice loose.


Prescott units: burner and connection valve, accessories, owners manual, spark igniter kit, vent covers, key valve bracket, 4 install collars and a cover, 65k orifice installed, 150k orifice loose.

Brandon units: burner and connection valve, accessories, owners manual, spark igniter kit, vent covers, key valve bracket, 4 install collars and a cover, 65k orifice installed, 150k orifice loose.


Raffinato units: burner and connection valve, accessories, owners manual, spark igniter kit, vent covers, key valve bracket, 4 install collars and a cover 65k orifice installed, 150k orifice loose.

The burner and connection valve come as one part connected. Install collars go around the perimeter of the fire pit.


Lumi Bowl: burner and connection valve, accessories, owners manual, key valve bracket, a vinyl cover, 65k orifice installed, 150k orifice loose.




HPC SQUARE - Compatible with Brandon Square and Prescott




HPC RECTANGLE - Compatible with Brandon Rectangle and Raffinato



HPC ROUND - Compatible with Lumi and Valencia

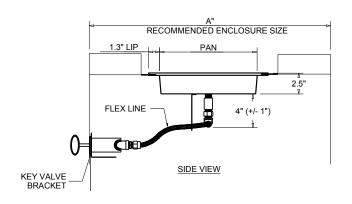



INSTALLATION GUIDE

BREEO SMOKELESS INSERTS

DESCRIPTION


If you enjoy spending nights by a woodburning fire but aren't a fan of the smoke, the Zentro smokeless insert by Breeo was made for you. Designed to provide more oxygen, this insert allows for a hotter fire that burns its own smoke before it has a chance to escape the fire pit. Say goodbye to teary eyes and coughs, and hello to a great night with friends and family.

PRODUCT DETAILS:

Size: 24"

Circular version compatible with: Valencia Circle Fire Pit

Square version compatible with: Brandon Square Fire Pit Prescott Square Fire Pit

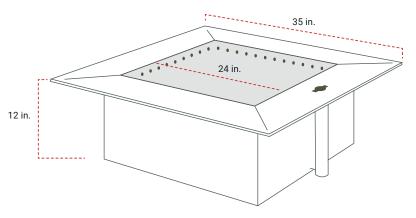

MATERIAL:

Zentro: Black Painted Steel


Weight: 113 lbs.

DIMENSIONS:

Inside Diameter of Bowl: 24 in. Outside Diameter of Rim: 35 in.

Total Height: 12 in.

BREEO SQUARE



MATERIAL:

Zentro: Black Painted Steel


Weight: 104 lbs.

DIMENSIONS:

Inside Diameter of Bowl: 24 in. Outside Diameter of Rim: 35 in.

Total Height: 12 in.

BREEO ROUND 24"



MATERIAL:

Outpost™ Grill:

Stainless Steel Solid Stainless Post

Anchorpoint™ System:

Stainless Steel

DIMENSIONS:

Outpost™ Grill:

Grill Total Width: 22 in. Grill Space Width: 20.5 in. Post Height: 23"

(Exposed above Anchorpoint)

Post Total Height: 28.5 in. (Inserts into Anchorpoint)

Max Height of Grill: 19 in. (Top of Anchorpoint to Bottom of Grill)

Anchorpoint™ System:

Anchorpoint Width: 7 in. Anchorpoint Height: 11 in.

Overall

Total Width: 27 in. Total Height: 34 in. Total Weight: 12 lbs. 9 oz.

Max Weight with Outpost™ Grill and Kettle Hook X24

X Series 19: 20 lbs. X Series 24: 40 lbs. X Series 30: 70 lbs.

(Weight limits with weight oriented 180 degrees opposite the pit)