



BLU 60 mm


DESCRIPTION: Slab **TEXTURE:** Smooth and HD² Smooth


Specifications per pallet[1]		Imperial	Metric
A  44 units / pallet	Product dimension (L × W × H) A	6 ½ × 13 × 2 ⅜	165 × 330 × 60
	Product dimension (L × W × H) B	13 × 13 × 2 ⅜	330 × 330 × 60
	Product dimension (L × W × H) C	19 ½ × 13 × 2 ⅜	495 × 330 × 60
B  44 units / pallet	Cubing	116.82 ft²	10.96 m²
	Approx. Weight Smooth	3 135 lbs	1 422 kg
	Approx. Weight HD² Smooth	3 295 lbs	1 495 kg
C  22 units	Number of rows	11	
	Coverage per row	10.62 ft²	0.99 m²
	Lin. coverage per row	9.81 lin. ft	3.02 lin. m

Specifications per pallet[2] (Only Available in Eastern USA and Canada)		Imperial	Metric
A  44 units / pallet	Product dimension (L × W × H) A	6 ½ × 13 × 2 ⅜	165 × 330 × 60
	Product dimension (L × W × H) B	13 × 13 × 2 ⅜	330 × 330 × 60
	Product dimension (L × W × H) C	19 ½ × 13 × 2 ⅜	495 × 330 × 60
B  44 units / pallet	Cubing	135.39 ft²	12.58 m²
	Approx. Weight HD² Smooth	3 779 lbs	1 714 kg
	Number of rows	11	
C  33 units	Coverage per row	12.31 ft²	1.14 m²
	Lin. coverage per row	11.37 lin. ft	3.47 lin. m

[2] New packaging HD² Smooth - Available after depletion of original packaging


Pallet Overview

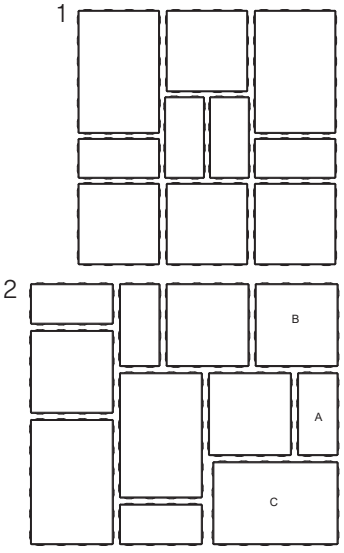

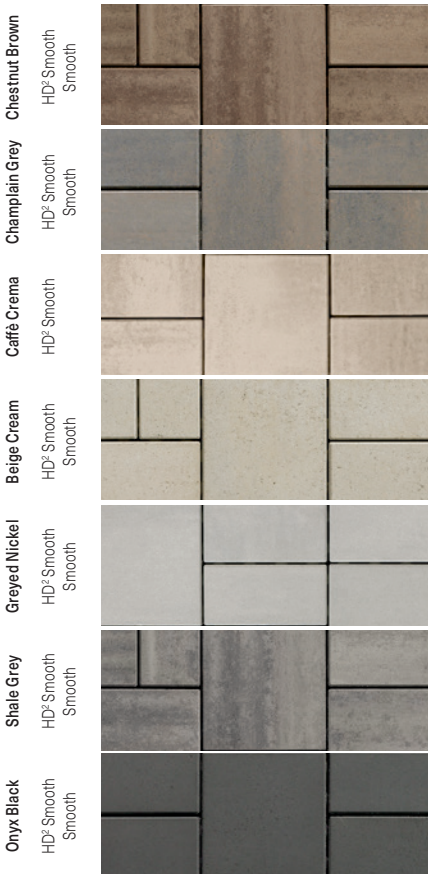

MECHANICAL INSTALLATION[2]

Step 1 Step 2 Step 3

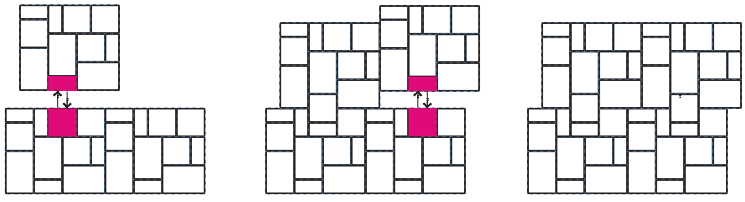

Clamp or Mechanical tool available for machine installation.
Check with your local Techo-Bloc representative for more information.

NOTES

See page 6 for icons description.

See page 26 for more information about applications.

See page 34 to 36 for more technical information. When used in a permeable pavement application, see page 100 to 110 for more technical information.

Please note that for barefoot walking areas (e.g. pool deck) dark-colored paving units could get very hot under the sun.

JOINT WIDTH: 9/32" (7 mm)
% OF SURFACE OPENING: 4.5%*
INFILTRATION RATE: 570 in./hr (14 475 mm/hr)

*For permeable application, the installation should be combined with Blu 6 × 13 in a modular pattern. A min. of 4.5% opening surface requires 75% of Blu 6 × 13 and 25% of Blu.





D HD² ❄ 💧 🚶 👣 🚗 ♿

BLU 60 mm (6" × 13")

DESCRIPTION: Slab **TEXTURE:** Smooth and HD² Smooth

Pallet Overview



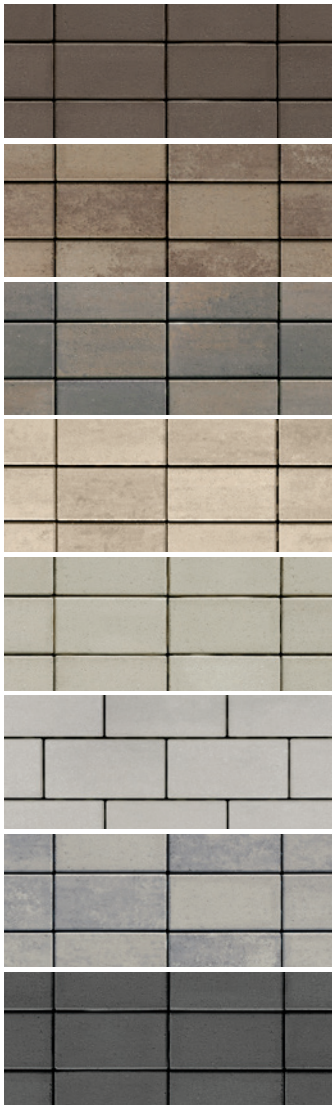

Smooth **Chocolate Brown**
HD² Smooth Smooth **Chestnut Brown**
HD² Smooth Smooth **Champlain Grey**
HD² Smooth **Caffè Crema**
HD² Smooth Smooth **Beige Cream**
HD² Smooth Smooth **Greyed Nickel**
HD² Smooth Smooth **Shale Grey**
HD² Smooth Smooth **Onyx Black**

Specifications per pallet




198 units / pallet


		Imperial	Metric
Product dimension (L × W × H)		6 ½ × 13 × 2 ⅜	165 × 330 × 60
Cubing		116.05 ft²	10.78 m²
Approx. Weight Smooth		3 121 lbs	1 415 kg
Approx. Weight HD² Smooth		3 147 lbs	1 427 kg
Number of rows		11	
Coverage per row		10.55 ft²	0.98 m²
Lin. coverage per row	Depth	19.5 lin. ft	5.94 lin. m
	Length	9.75 lin. ft	2.97 lin. m

Laying Patterns Options


08 | Linear




09 | Linear



10 | Parquet



11 | Herringbone



Patterns are for design inspiration only. The installer is responsible to calculate & purchase the correct amount of material.

NOTES


See page 6 for icons description.

See page 26 for more information about applications.

See page 34 to 36 for more technical information. When used in a permeable pavement application, see page 100 to 110 for more technical information.

JOINT WIDTH: 3/32" (7 mm)
% OF SURFACE OPENING: 4.8%
INFILTRATION RATE: 570 in./hr (14 475 mm/hr)


Please note that for barefoot walking areas (e.g. pool deck) dark-colored paving units could get very hot under the sun.

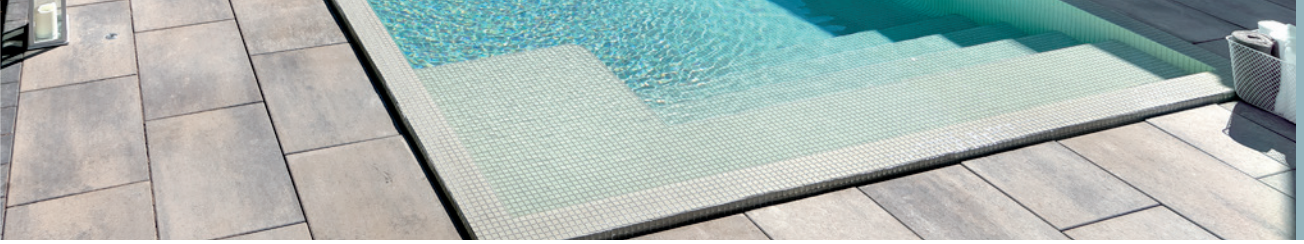


BLU GRANDE

DESCRIPTION: Slab **TEXTURE:** Smooth and HD² Smooth

Pallet Overview



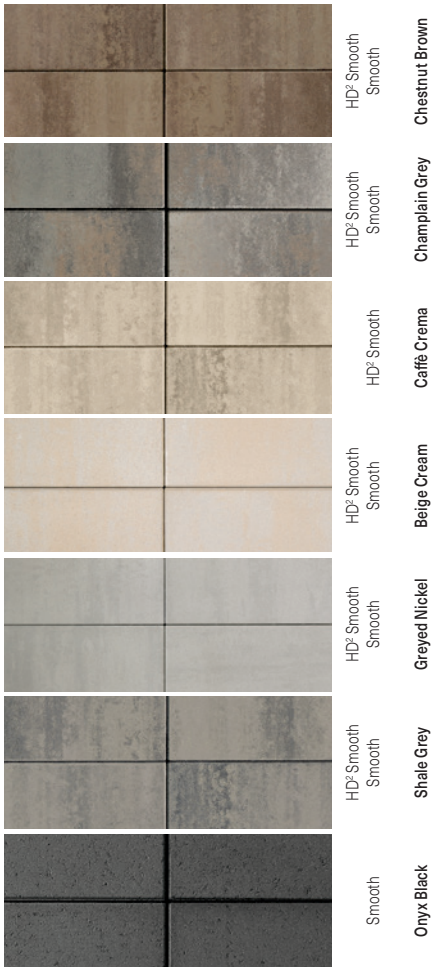


SMOOTH			
Specifications per pallet		Imperial	Metric
 20 units / pallet	Product dimension (L × W × H)	32 ½ × 19 ½ × 2 ⅜	825 × 495 × 60
	Cubing	87.91 ft²	8.17 m²
	Approx. Weight	2 456 lbs	1 114 kg
	Number of rows	10	
	Coverage per row	8.79 ft²	0.82 m²
	Lin. coverage per row — Depth	3.25 lin. ft	0.99 lin. m
	Lin. coverage per row — Length	5.41 lin. ft	1.65 lin. m


HD² SMOOTH			
Specifications per pallet		Imperial	Metric
 22 units / pallet	Product dimension (L × W × H)	32 ½ × 19 ½ × 2 ⅜	825 × 495 × 60
	Cubing	96.71 ft²	8.98 m²
	Approx. Weight	2 744 lbs	1 244 kg
	Number of rows	11	
	Coverage per row	8.79 ft²	0.82 m²
	Lin. coverage per row — Depth	3.25 lin. ft	0.99 lin. m
	Lin. coverage per row — Length	5.41 lin. ft	1.65 lin. m

Laying Patterns Options


04 | Linear




05 | Linear



06 | Linear



07 | Herringbone



Patterns are for design inspiration only. The installer is responsible to calculate & purchase the correct amount of material.

NOTES

See page 6 for icons description.

See page 26 for more information about applications.

See page 34 to 36 for more technical information.

Allowable load Capacity of slab on pedestal set (including a safety factor of 2): 776 lb (352 kg)

The application on pedestal Set for Blu Grande is recommended for Blu Grande in HD² only.

Please note that for barefoot walking areas (e.g. pool deck) dark-colored paving units could get very hot under the sun.