





BLU 60 mm

DESCRIPTION: Slab **TEXTURE:** Smooth and HD² smooth

PALLET OVERVIEW



NOTES

See page 26 to 28 for more technical information. When used in a permeable pavement application, see page 93 to 100 for more technical information.

See page 20 for more information about applications.

JOINT WIDTH: 9/32" (7 mm)

% OF SURFACE OPENING: 4.5%**




INFILTRATION RATE: 570 in./hr (14 475 mm/hr)

*For this application, it is recommended that this product be installed on a concrete base as designed by a local Engineer.

**For permeable application, the installation should be combined with Blu 6x13 in a modular pattern. A min. of 4.5% opening surface requires 75% of Blu 6x13 and 25% of Blu.

Specifications per pallet ¹	Imperial	Metric
Cubing	116.82 ft²	10.96 m ²
Approx. Weight Smooth	3 170 lbs	1 438 kg
Approx. Weight HD ² Smooth	3 295 lbs	1 495 kg
Number of rows	11	
Coverage per row	10.62 ft ²	0.99 m ²
Linear coverage per row	9.81 lin. ft	3.02 lin. m


Specifications per pallet ²	Imperial	Metric
Cubing	135.39 ft²	12.58 m ²
Approx. Weight HD ² Smooth	3 779 lbs	1 714 kg
Number of rows	11	
Coverage per row	12.31 ft ²	1.14 m ²
Linear coverage per row	11.37 lin. ft	3.47 lin. m

	Unit dimensions	in	mm	Units/pallet
 A	Height	2 3/8	60	44 units
	Width	13	330	
	Length	6 1/2	165	
 B	Height	2 3/8	60	44 units
	Width	13	330	
	Length	13	330	
 C	Height	2 3/8	60	22 units ¹ / 33 units ²
	Width	13	330	
	Length	19 1/2	495	

¹HD² smooth - Available while quantities last

²New packaging HD² smooth - Available after depletion of original packaging

MECHANICAL INSTALLATION

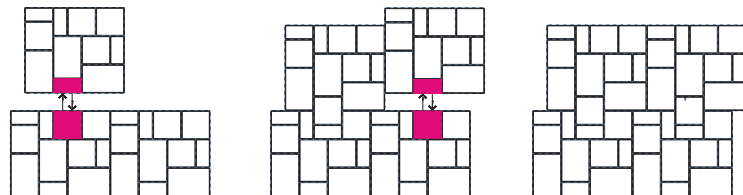

Clamp or Mechanical tool available for machine installation.

Check with your local Techo-Bloc representative for more information.

Chestnut Brown
HD² Smooth
Smooth

Champlain Grey
HD² Smooth
Smooth

Beige Cream
HD² Smooth
Smooth

Greyed Nickel
HD² Smooth
Smooth

Shale Grey
HD² Smooth
Smooth

Onyx Black
HD² Smooth
Smooth

Caffè Crema
HD² Smooth

