

# W

TECHO-BLOC WARRANTY APPLIES TO  
PRESCOTT STONES. THE WARRANTY  
**DOES NOT APPLY** TO ACCESSORY KIT.

## PRESCOTT

**DESCRIPTION:** Fire pit    **TEXTURE:** Chiseled Face




| Specifications per pallet   | Imperial                              | Metric   |
|-----------------------------|---------------------------------------|----------|
| Approx. Weight              | 2 813 lbs                             | 1276 kg  |
| Height                      | 18 in                                 | 457 mm   |
| Depth                       | 51 ¾ in                               | 1 314 mm |
| Length                      | 51 ¾ in                               | 1 314 mm |
| Piedimonte caps             | 6                                     |          |
| Prescott 2,25" block        | 7 <b>A</b> , 18 <b>B</b> , 7 <b>C</b> |          |
| Prescott 4,5" block         | 3 <b>A</b> , 6 <b>B</b> , 3 <b>C</b>  |          |
| Prescott 2,25" corner block | 16                                    |          |
| Prescott 4,5" corner block  | 6                                     |          |


### Options and accesories (sold separately)

Sleeve Insert

Wood Firepit

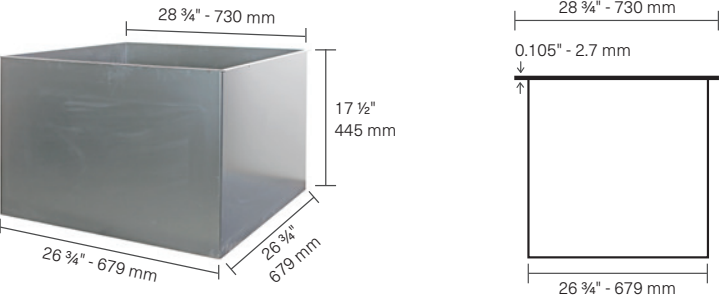

Smokeless Insert

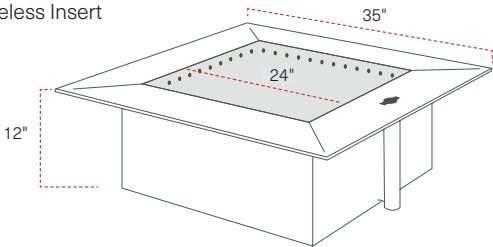

### HPC BURNERS AND BREEO ACCESSORIES (SOLD SEPARATELY)


#### HPC BURNERS

##### FEATURES:

Natural Gas or Liquid Propane  
Standard BTU: 65K  
Push button ignition

##### INCLUDES:

Stainless steel burner with aluminum pan, mounting  
brackets, Dante valve with push-button ignition,  
vents, lava rock and stainless steel cover.  
See page 127 for details.

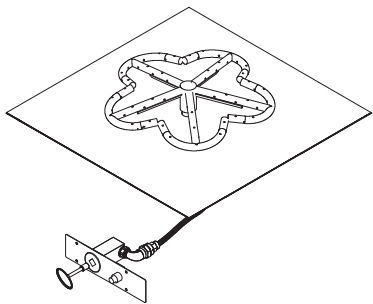

#### GRILLING SYSTEM OUTPOST™

Only for Smokeless inserts

Transforms fire pit into wood-fired grill.  
Weight: 12 lbs. 9 oz.  
Diameter: 22 inches  
See page 128 for details.



### NOTES

See page 6 for icons description.

Available with UGO (Universal Gas Orifice) for  
natural gas & liquid propane burning options, wood  
burning or smokeless wood burning.

**Sold as a kit not pre-assembled.**  
**Piedimonte caps included.**

**Techo-Bloc is not responsible for any damages  
to the firepit if it is not installed with a sleeve or  
accessory kit. The firepit is not designed for large  
fires. Fire should be contained at least 6" away**

**from the firepit wall blocks. Overheating could  
lead to heat damage to the firepit components.**


\*For an authentic look, each color option is  
composed of a variety of darker & lighter tones.  
Natural ingredients such as granite are present  
within the recipe to allow for a range in tones,  
veining and textures from one stone to another.

**OPTIONS AND ACCESORIES are  
SOLD SEPARATELY.**


See 122 for more technical information.

# INSTALLATION GUIDE

## PRESCOTT FIRE PIT (KIT)

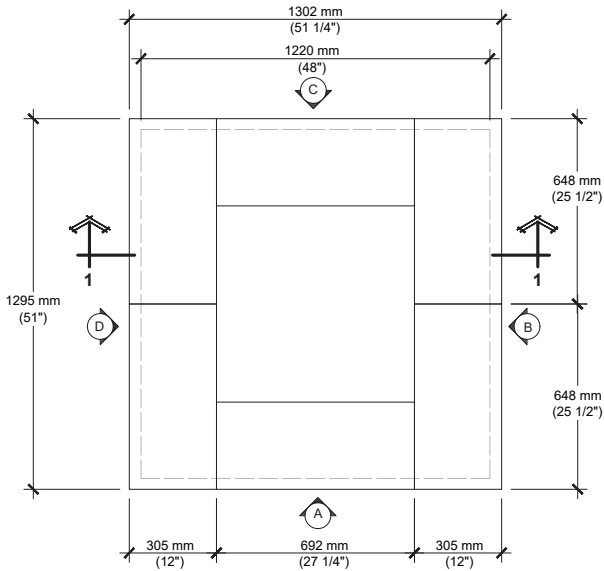

TOP

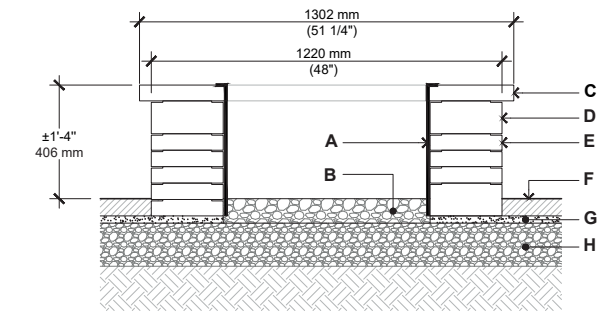

SECTION 1-1

- A. STEEL BOX INSERT
- B. CLEAN STONE 3/4" (20 mm), 4" (100 mm) THICK
- C. PIEDIMONTE CAP (CUT)
- D. PRESCOTT 4.5" BLOCK
- E. PRESCOTT 2.25" BLOCK
- F. TECO-BLOC PAVERS OR SLABS
- G. SETTING BED 1" (25 mm)
- H. COMPACTED GRANULAR BASE 0-3/4" (0-20 mm) (SEE TABLE PAGE 64 FOR THICKNESS)
- I. PRESCOTT 4.5" CORNER BLOCK
- J. PRESCOTT 2.25" CORNER BLOCK


### QUANTITY OF MATERIALS REQUIRED

- Piedimonte cap: **6**
- Prescott 2.25" block: **7 A, 18 B, 7 C**
- Prescott 4.5" block: **3 A, 6 B, 3 C**
- Prescott 2.25" corner block: **16**
- Prescott 4.5" corner block: **6**


**NOTE :** Secure the blocks using a heat resistant concrete adhesive. The installer must ensure that the installation and use of the firepit comply with local regulations and code requirements.

 RECOMMENDED LOCATION FOR VENT ACCESSORY (GAS KIT);


 RECOMMENDED LOCATION FOR IGNITION CONTROL (GAS KIT);

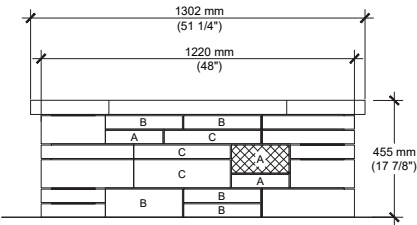


ELEVATION A

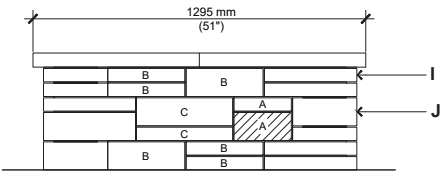

ELEVATION B

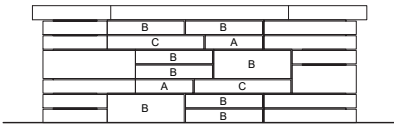

ELEVATION C

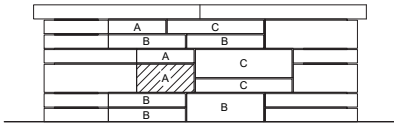

ELEVATION D

Consult our Installation Guide in our website for a detailed step by step installation.