








BLU 80 mm

DESCRIPTION: Paver TEXTURE: Polished



Specifications per pallet		Imperial	Metric
A	 Product dimension (L x W x H) A	6 1/2 x 13 x 2 15/16	165 x 330 x 75
	32 units / pallet		
B	 Product dimension (L x W x H) B	13 x 13 x 2 15/16	330 x 330 x 75
	32 units / pallet		
C	 Product dimension (L x W x H) C	19 1/2 x 13 x 2 15/16	495 x 330 x 75
	16 units / pallet		
	Cubing	84.96 ft ²	7.90 m ²
	Approx. Weight	3 042 lbs	1 380 kg
	Number of rows	8	
	Coverage per row	10.62 ft ²	0.99 m ²
	Lin. coverage per row	9.75 lin. ft	2.97 lin. m

Pallet Overview




Laying Patterns Options


01 | Modular

02 | Modular

03 | Linear

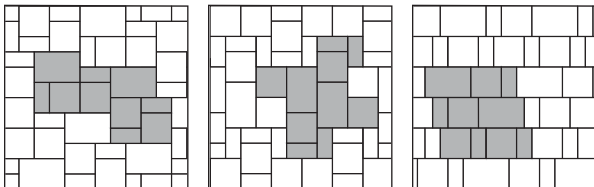

Patterns are for design inspiration only. The installer is responsible to calculate & purchase the correct amount of material.

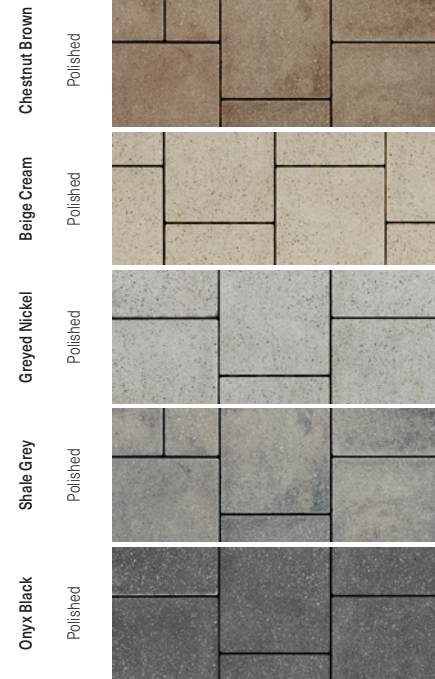

NOTES

See page 6 for icons description.

See page 27 for more information about applications.

See page 62 to 64 for more technical information.

When used in a permeable pavement application, see page 100 to 105 for more technical information.

Polished is made-to-order, minimum order of 500 sq. ft. Deposit required.

JOINT WIDTH: 3/32" (7 mm)

% OF SURFACE OPENING: 4.5%*

INFILTRATION RATE: 570 in./hr (14 475 mm/hr)

*For permeable application, the installation should be combined with Blu 6 x 13 in a modular pattern. A min. of 4.5% opening surface requires 75% of Blu 6 x 13 and 25% of Blu.

Please note that for barefoot walking areas (e.g. pool deck) dark-colored paving units could get very hot under the sun.