



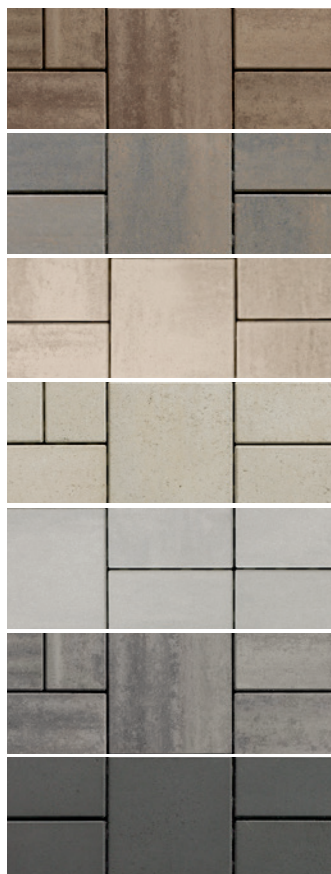

## BLU 80 mm

**DESCRIPTION:** Paver **TEXTURE:** Smooth and HD<sup>2</sup> Smooth

### Pallet Overview



HD<sup>2</sup> Smooth  
Smooth  
Chestnut Brown  
HD<sup>2</sup> Smooth  
Smooth  
Champlain Grey  
HD<sup>2</sup> Smooth  
Smooth  
Caffè crema  
Smooth  
Beige Cream  
HD<sup>2</sup> Smooth  
Smooth  
Greyed Nickel  
HD<sup>2</sup> Smooth  
Smooth  
Shale Grey  
HD<sup>2</sup> Smooth  
Smooth  
Onyx Black

### Specifications per pallet


|          |                                                                                   |                                        |                       |                     |
|----------|-----------------------------------------------------------------------------------|----------------------------------------|-----------------------|---------------------|
| <b>A</b> |  | Product dimension (L x W x H) <b>A</b> | 6 1/2 x 13 x 3 1/8    | 165 x 330 x 80      |
|          |                                                                                   | Product dimension (L x W x H) <b>B</b> | 13 x 13 x 3 1/8       | 330 x 330 x 80      |
|          |                                                                                   | Product dimension (L x W x H) <b>C</b> | 19 1/2 x 13 x 3 1/8   | 495 x 330 x 80      |
| <b>B</b> |  | Cubing                                 | 84.96 ft <sup>2</sup> | 7.90 m <sup>2</sup> |
|          |                                                                                   | Approx. Weight Smooth                  | 3 095 lbs             | 1 404 kg            |
|          |                                                                                   | Approx. Weight HD <sup>2</sup> Smooth  | 3 280 lbs             | 1 488 kg            |
| <b>C</b> |  | Number of rows                         | 8                     |                     |
|          |                                                                                   | Coverage per row                       | 10.62 ft <sup>2</sup> | 0.99 m <sup>2</sup> |
|          |                                                                                   | Lin. coverage per row                  | 9.75 lin. ft          | 2.97 lin. m         |

### Laying Patterns Options

01 | Modular

02 | Modular

03 | Linear

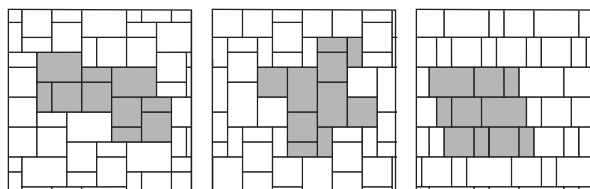

Patterns are for design inspiration only. The installer is responsible to calculate & purchase the correct amount of material.

### NOTES

See page 6 for icons description.

See page 27 for more information about applications.

See page 62 to 64 for more technical information. When used in a permeable pavement application, see page 100 to 105 for more technical information.

**JOINT WIDTH:** 3/32" (7 mm)

**% OF SURFACE OPENING:** 4.5%\*

**INFILTRATION RATE:** 570 in./hr (14 475 mm/hr)

\*For permeable application, the installation should be combined with Blu 6 x 13 in a modular pattern. A min. of 4.5% opening surface requires 75% of Blu 6 x 13 and 25% of Blu.

Please note that for barefoot walking areas (e.g. pool deck) dark-colored paving units could get very hot under the sun.