




ESCALA 3,5"

DESCRIPTION: Wall double-sided **TEXTURE:** Split Face and Aged

PILLAR PALLET OVERVIEW



COMPATIBLE CAPS


See page 100 for product compatibility.

NOTES

When building a double-sided wall one pallet will cover an average of 26.24 ft².

See page 96 to 116 for more technical information.

01 | Linear pattern



Patterns are for design inspiration only. The installer is responsible to calculate & purchase the correct amount of material.

Visit our website for more patterns.

Specifications per pallet	Imperial	Metric
Cubing	27.65 ft²	2.57 m ²
	94.62 lin. ft	28.84 lin. m
Approx. Weight	2 940 lbs	1 334 kg
Minimum radius	7.5 ft	2.25 m
Number of rows	7	
Coverage per row	3.95 ft ² /row	0.37 m ² /row
Linear coverage per row	13.52 lin. ft/row	4.12 lin. m/row



Unit dimensions	in	mm	Units/pallet
A (Image)	Height: 3 9/16	90	28 units
	Depth: 9 13/16	250	
	Length 1: 10 5/8	270	
	Length 2: 8 11/16	220	

B (Image)	Height: 3 9/16	90	21 units
	Depth: 9 13/16	250	
	Length 1: 14 3/16	360	
	Length 2: 12 3/16	310	

B* (Image)	Height: 3 9/16	90	7 units
	Depth: 9 13/16	250	
	Length 1: 14 3/16	360	
	Length 2: 14 3/16	360	

C (Image)	Height: 3 9/16	90	14 units
	Depth: 9 13/16	250	
	Length 1: 15 3/4	400	
	Length 2: 13 3/4	350	

D (Image)	Height: 3 9/16	90	14 units
	Depth: 9 13/16	250	7 right corners
	Length 1: 15 3/4	400	7 left corners
	Length 2: 14 3/4	375	

sandlewood




shale grey



champlain grey




chestnut brown



INSTALLATION GUIDE


FREESTANDING WALLS - ESCALA 3,5"

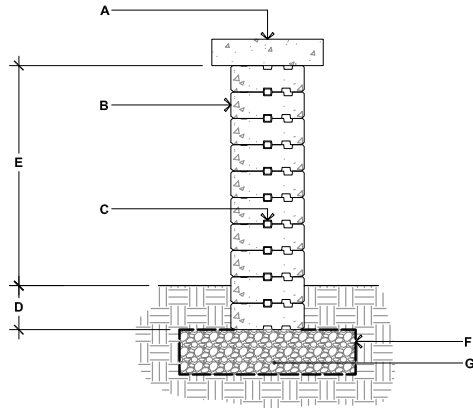

ESCALA 3,5"


- A.** TECO-BLOC CAP UNIT SECURED TO UNIT BELOW WITH CONCRETE ADHESIVE
- B.** ESCALA 3.5" DOUBLE-SIDED WALL UNIT SECURE EACH ROW WITH CONCRETE ADHESIVE
- C.** CONNECTOR
- D.** EMBEDMENT DEPTH, 6" (150 mm) MIN.
- E.** 750 mm (29 7/16") MAX.
- F.** GEOTEXTILE
- G.** COMPACTED GRANULAR BASE 0-20 mm (0-3/4"), 300 mm (12") THICK MIN.

90° CORNER OF A DOUBLE-SIDED WALL

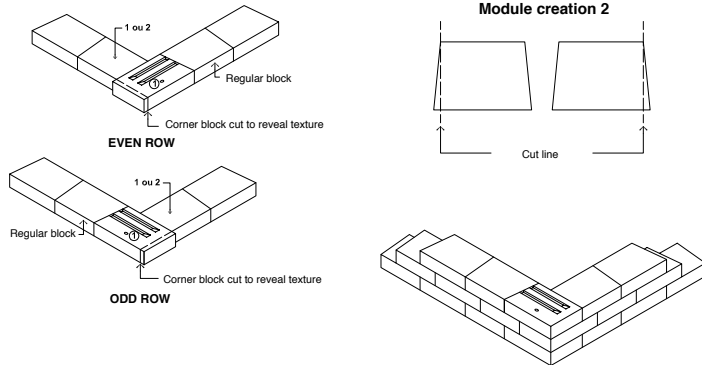

1. Alternate odd and even rows.
2. Stagger joints from one row to the next.
3. Glue all modules at each row with a concrete adhesive.
4. Cavities, grooves and connectors are not illustrated to avoid overloading the image.
5. It is possible to alternate the blocks (A, B or C) in the same row to create different patterns. However, a corner block must always be present at the end of a row and must be alternated for each subsequent row.


DOUBLE-SIDED WALL - END OF A STRAIGHT WALL

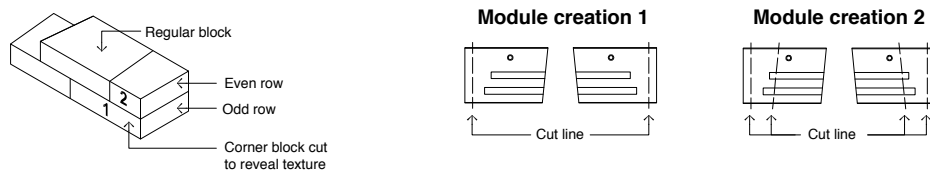

* It is possible to alternate the blocks (A, B or C) in the same row to create different patterns. However, a corner block must always be present at the end of a row and must be alternated for each subsequent row.

INSTALLATION GUIDE


DOUBLE-SIDED WALL RADIUS - ESCALA 3.5"

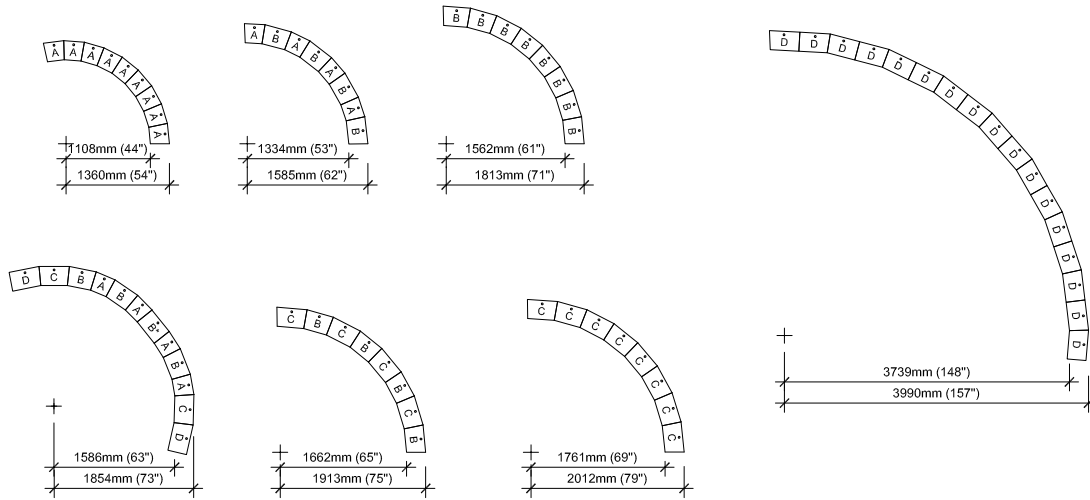

It is the user's responsibility to verify for the quantity of materials required.


STEPS

ESCALA 3.5"

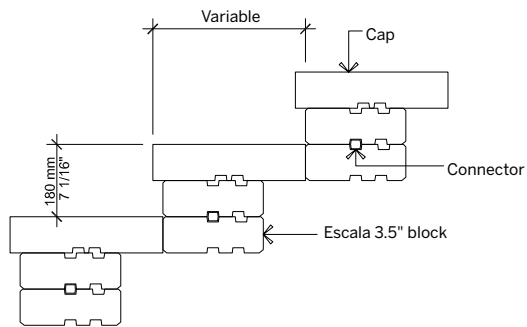

For all possible combinations of walls and caps, please refer to the correspondence table on 100.

CAP RADIUS - ESCALA 3.5"

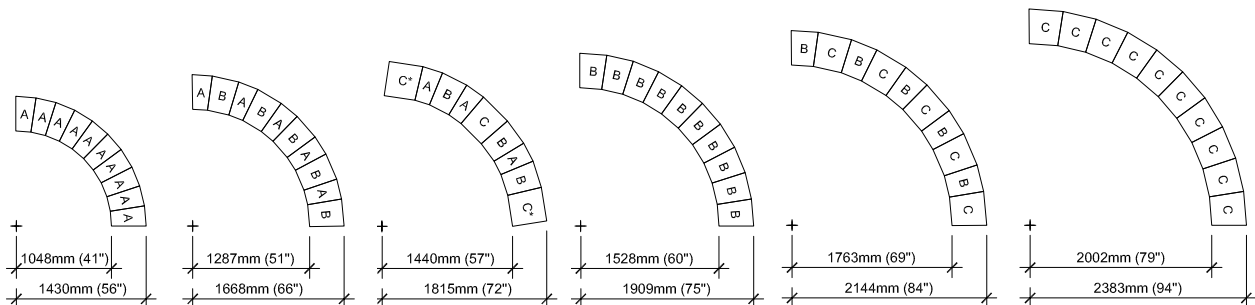

It is the user's responsibility to verify for the quantity of materials required.