



D

FASCIA wall collection

DESCRIPTION: Base and Structural block single-sided & double-sided **TEXTURE:** Smooth

SINGLE-SIDED

Specifications per pallet




96 units / pallet

	Imperial	Metric
Product dimension (L × D × H)	7 7/8 × 9 1/4 × 5 7/8	200 × 235 × 150
Cubing	96 units	96 units
	31.00 ft ²	2.88 m ²
	62.99 lin. ft	19.20 lin. m
Approx. Weight	2 612 lbs	1 185 kg
Number of rows	4	
Coverage per row	7.75 ft ²	0.72 m ²
Linear coverage per row	15.75 lin. ft	4.80 lin. m

DOUBLE-SIDED

Specifications per pallet



72 units / pallet

	Imperial	Metric
Product dimension (L × D × H)	7 7/8 × 11 1/6 × 5 7/8	200 × 281 × 150
Cubing	72 units	72 units
	23.25 ft ²	2.16 m ²
	47.24 lin. ft	14.40 lin. m
Approx. Weight	2 138 lbs	970 kg
Number of rows	4	
Coverage per row	5.81 ft ²	0.54 m ²
Linear coverage per row	11.81 lin. ft	3.60 lin. m

BASE

Specifications per pallet



66 units / pallet

	Imperial	Metric
Product dimension (L × D × H)	23 5/8 × 12 × 2 3/8	600 × 305 × 60
Cubing	66 units	66 units
	25.58 ft ²	2.38 m ²
	129.92 lin. ft	39.60 lin. m
Approx. Weight	3 701 lbs	1 679 kg
Number of rows	11	
Coverage per row	2.33 ft ²	0.22 m ²
Linear coverage per row	11.81 lin. ft	3.60 lin. m

NOTES


See page 6 for icons description.

COMPATIBLE CAPS


See page 145 for product compatibility..

See page 146 to 161 for more technical information.


Pallet Overview - single-sided




Pallet Overview - double-sided



Pallet Overview - base



The top of Fascia Panels shall not be left exposed, they must be stabilized with a structural block on top or glued to the cap.

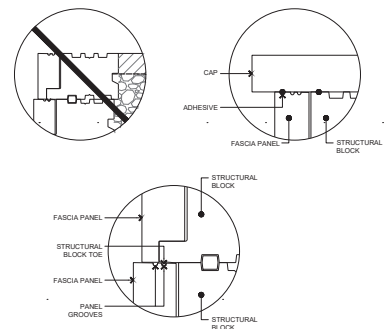





ICONIC Fascia wall collection

DESCRIPTION: Fascia Panel & Corner **TEXTURE:** Klean-Bloc Slate

Pallet Overview- panels



Pallet Overview- corners



Klean-Bloc Natural Stone
Rock Garden Brown
Victoria
Klean-Bloc Natural Stone
Riviera
Klean-Bloc Natural Stone
Onyx Black

FASCIA


Specifications per pallet

	Imperial	Metric
Product dimension (L x D x H)	26 x 2 3/4 x 5 7/8	660 x 70 x 150
Cubing	42 units	42 units
	44.75 ft ²	4.16 m ²
	90.94 lin. ft	27.72 lin. m
Approx. Weight	1 250 lbs	567 kg
Number of rows	7	
Coverage per row	6.39 ft ²	0.60 m ²
Linear coverage per row	13.03 lin. ft	3.96 lin. m


CORNER

Specifications per pallet

	Imperial	Metric
Product dimension (L x D x H) A	23 1/4 x 2 3/4 x 5 7/8	590 x 70 x 150
Product dimension (L x D x H) B	23 1/4 x 2 3/4 x 5 7/8	590 x 70 x 150
Cubing	24 units	24 units
Approx. Weight	700 lbs	318 kg
Number of rows	4	
Pillar height	35 7/8 in	900 mm



The top of Fascia Panels shall not be left exposed, they must be stabilized with a structural block on top or glued to the cap.

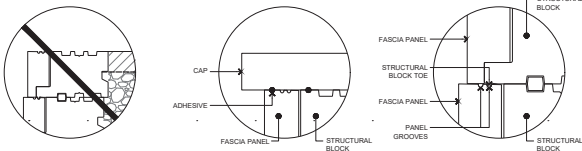

NOTES

See page 6 for icons description.

COMPATIBLE CAPS


See page 145 for product compatibility.

See page 146 to 161 for more technical information.

Fascia Panels require single-sided structural blocks (retaining wall application) or double-sided structural blocks (freestanding walls). Sold Separately.


INSTALLATION GUIDE

FREESTANDING WALL

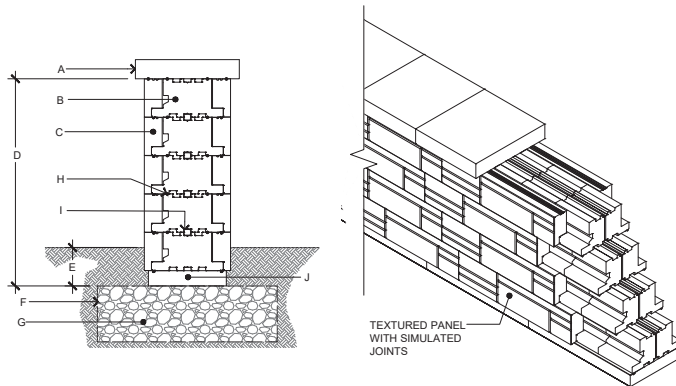

- A. TECO-BLOC CAP UNIT SECURED TO CORE AND PANEL BELOW WITH CONCRETE ADHESIVE
- B. STRUCTURAL BLOCK DOUBLE-SIDED UNIT
- C. PANEL UNIT
- D. 29 1/2" (750 mm) MAX.
- E. EMBEDMENT DEPTH 6" (150 mm) MIN.
- F. GEOTEXTILE
- G. COMPACTED GRANULAR BASE 6" (150 mm) MIN. THICKNESS ACCORDING TO PROJECT SPECIFICATIONS
- H. CONCRETE ADHESIVE
- I. HDPE HORIZONTAL KEY
- J. BASE UNIT

FREESTANDING WALL - 90° CORNER

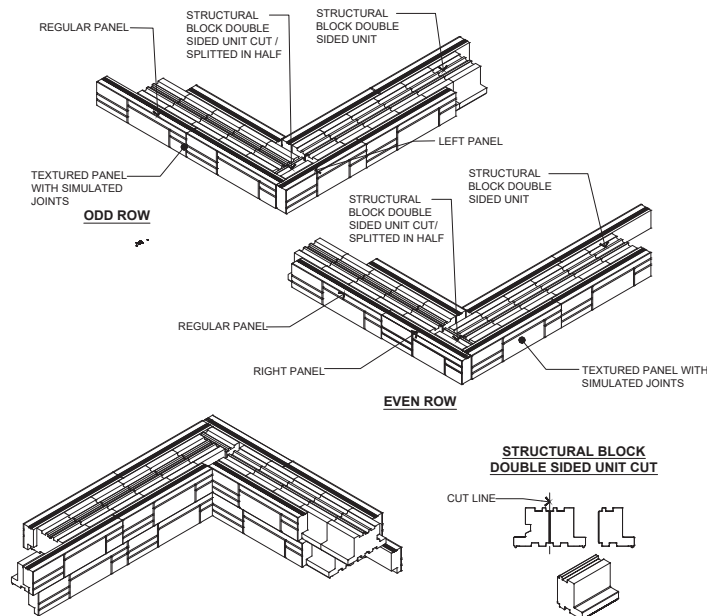


1. ALTERNATE ODD AND EVEN ROWS.
2. STAGGER STRUCTURAL BLOCKS JOINTS FROM ONE ROW TO THE NEXT.
3. GLUE ALL STRUCTURAL BLOCKS AT EACH ROW WITH CONCRETE ADHESIVE.
4. APPLY CONCRETE ADHESIVE ON TOP OF UPPERMOST PANEL UNITS TO FIX CAP UNITS.
5. STRUCTURAL BLOCK DOUBLE SIDED UNIT CUT / SPLITTED IN HALF MUST ALWAYS BE PRESENT AT THE CORNER OF THE WALL.

NOTE:

The top of Fascia Panels shall not be left exposed, they must be stabilized with a structural block on top or glued to the cap.



GRAVITY RETAINING WALL

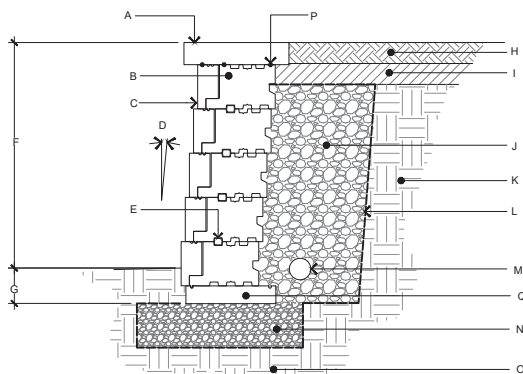

- A. TECO-BLOC CAP UNIT SECURED TO UNIT BELOW WITH CONCRETE ADHESIVE
- B. STRUCTURAL BLOCK SINGLE SIDED UNIT
- C. PANEL UNIT
- D. WALL INCLINATION (5.3°)
- E. HDPE HORIZONTAL KEY
- F. EXPOSED HEIGHT
- G. EMBEDMENT DEPTH
- H. TOP SOIL
- I. LOW PERMEABILITY SOIL
- J. 3/4" (20 mm) CLEAN STONE 14" (350mm) THICK MIN.
- K. RETAINED SOIL
- L. GEOTEXTILE
- M. PERFORATED DRAIN
- N. LEVELING PAD
- O. FOUNDATION SOIL
- P. CONCRETE ADHESIVE
- Q. BASE UNIT


INSTALLATION GUIDE

FREESTANDING END OF A STRAIGHT WALL (OPTION 1)

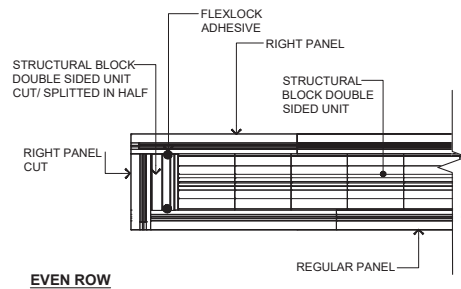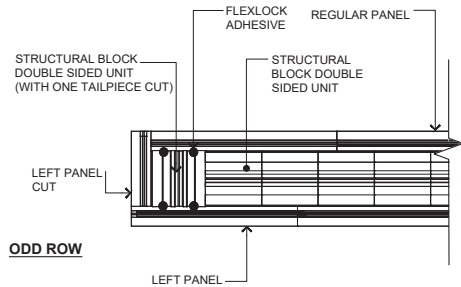

NOTES:



1. ALTERNATE ODD AND EVEN ROWS.
2. STAGGER STRUCTURAL BLOCKS JOINTS FROM ONE ROW TO THE NEXT.
3. GLUE ALL STRUCTURAL BLOCKS AT EACH ROW WITH FLEXLOCK ADHESIVE.
4. APPLY FLEXLOCK ADHESIVE ON TOP OF UPPERMOST PANEL UNITS TO FIX CAP UNITS.

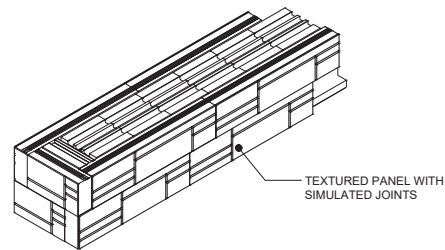

NOTE:


The top of Fascia Panels shall not be left exposed, they must be stabilized with a structural block on top or glued to the cap.

FREESTANDING END OF A STRAIGHT WALL (OPTION 2)

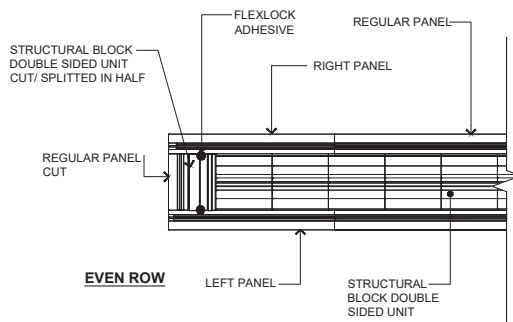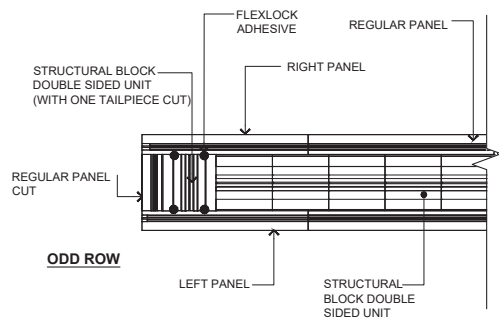


NOTES:

1. ALTERNATE ODD AND EVEN ROWS.
2. STAGGER STRUCTURAL BLOCKS JOINTS FROM ONE ROW TO THE NEXT.
3. GLUE ALL STRUCTURAL BLOCKS AT EACH ROW WITH FLEXLOCK ADHESIVE.
4. APPLY FLEXLOCK ADHESIVE ON TOP OF UPPERMOST PANEL UNITS TO FIX CAP UNITS.

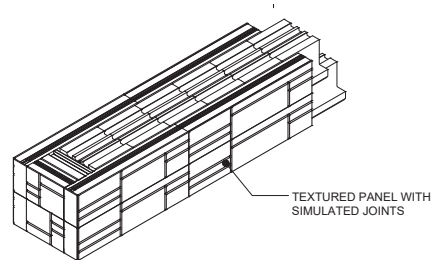


INSTALLATION GUIDE

PILLARS - FASCIA WALL COLLECTION

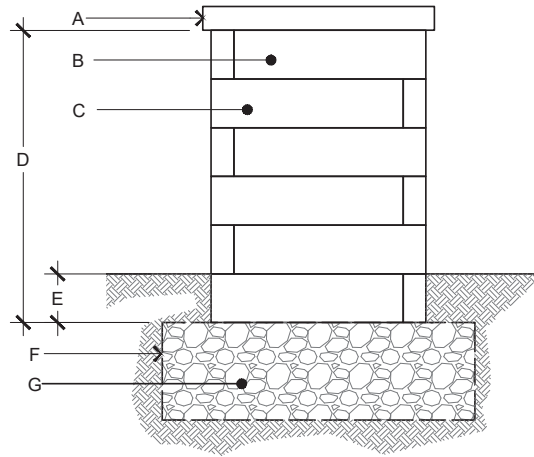


STRUCTURAL BLOCK SINGLE SIDED UNIT CUT / SPLITTED IN HALF




- A. PILLAR CAP UNIT SECURED TO CORE AND PANEL BELOW WITH CONCRETE ADHESIVE
- B. RIGHT PANEL
- C. LEFT PANEL
- D. 35 7/8" (900 mm) MAX HEIGHT
- E. EMBEDMENT DEPTH 6" (150 mm) MIN.
- F. GEOTEXTILE
- G. COMPACTED GRANULAR BASE 6" (150 mm) MIN. THICKNESS ACCORDING TO PROJECT SPECIFICATIONS.

NOTE:

The top of Fascia Panels shall not be left exposed, they must be stabilized with a structural block on top or glued to the cap

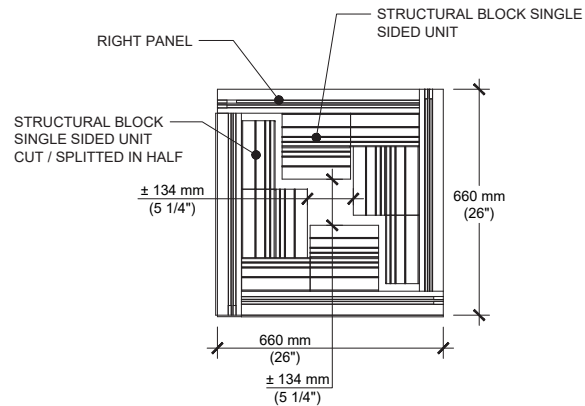


ODD ROW

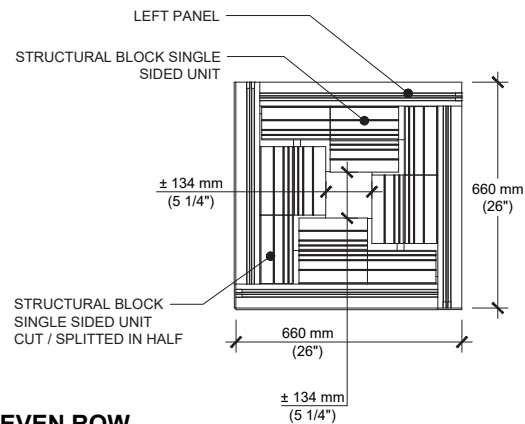

EVEN ROW

IIN.


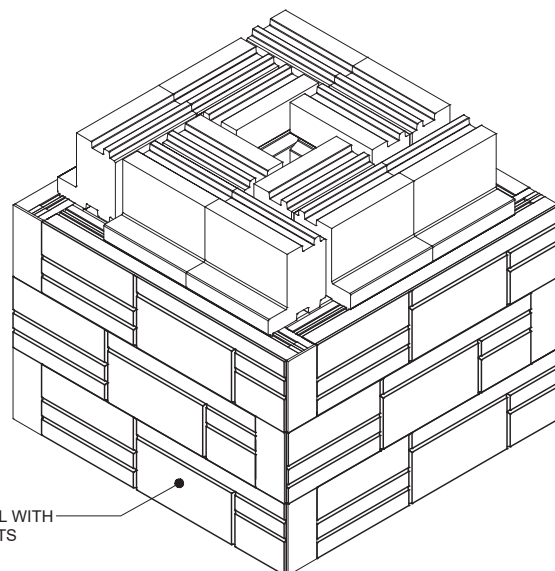


TEXTURED PANEL WITH
SIMULATED JOINTS

For all possible combinations of pillars and caps, please refer to the correspondence table on page 145

INSTALLATION GUIDE

STEPS - FASCIA WALL COLLECTION

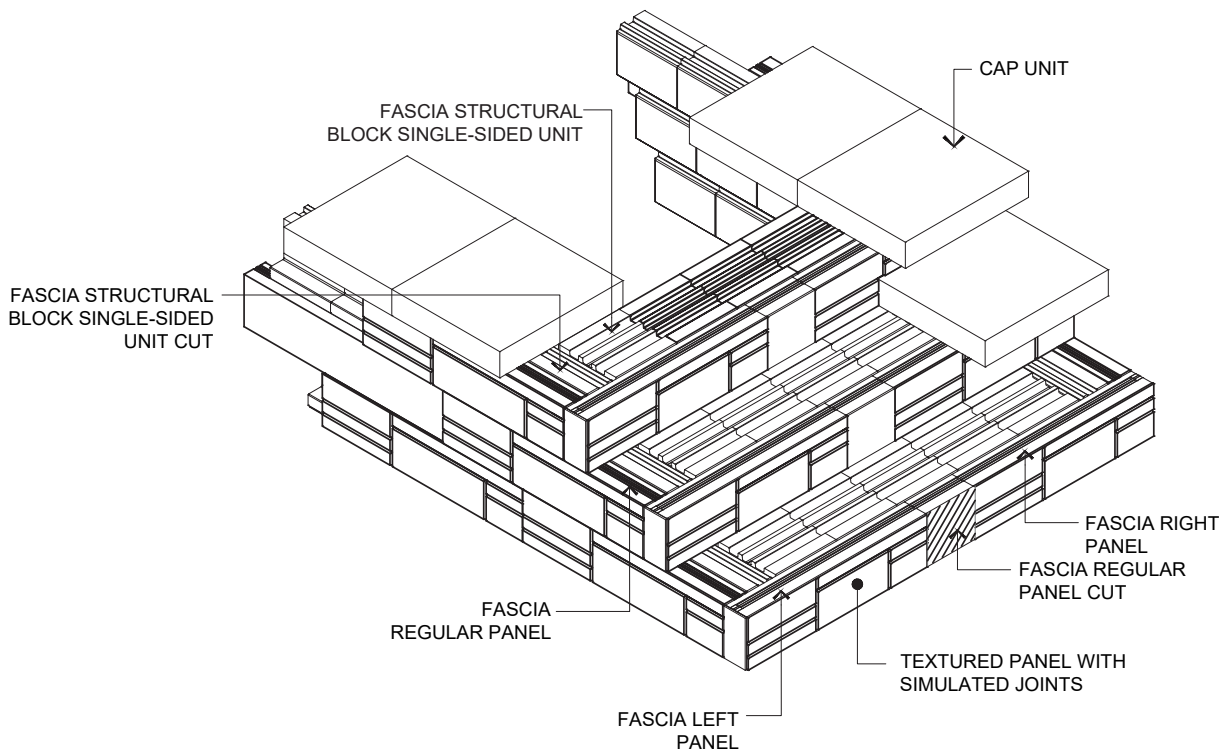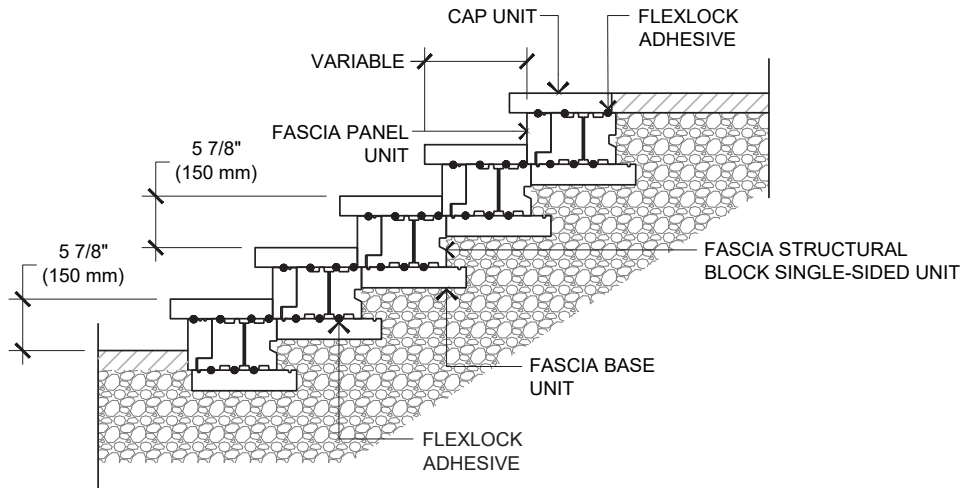

NOTE:

The top of Fascia Panels shall not be left exposed, they must be stabilized with a structural block on top or glued to the cap

Check with your local Building Codes to determine any restrictions or guidelines regarding the dimensions of steps (including riser height and step tread) as well as handrail specifications.