


EDGES

EDGES & BORDERS




INSTALLATION GUIDE

INTERLOCKING CONCRETE PAVEMENT

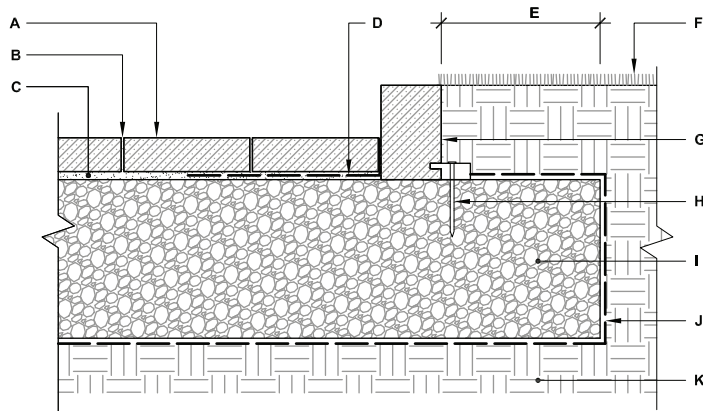


TYPICAL PAVER CROSS SECTION WITH AVIGNON EDGE

- A. TECHO-BLOC PRECAST CONCRETE PAVER 2 3/8" (60 mm) THICK MIN.
- B. SAND JOINT FILL
- C. SAND SETTING BED (CONCRETE SAND) 1" (25 mm)
- D. GEOTEXTILE 12" (300 mm) WIDE
- E. EXTRA WIDTH EQUAL TO FOUNDATION THICKNESS
- F. LAWN
- G. TECHO-BLOC AVIGNON EDGE
- H. NAIL
- I. COMPACTED GRANULAR BASE 0-3/4" (0-20 mm)
- J. GEOTEXTILE
- K. SUBGRADE

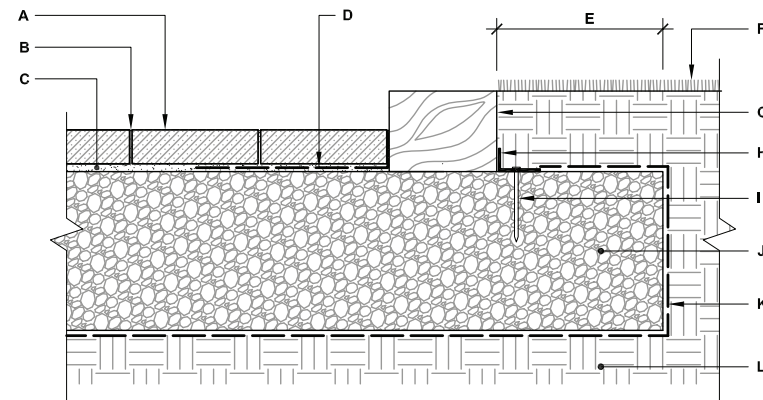

TYPICAL PAVER CROSS SECTION WITH BOREALIS EDGE

- A. TECHO-BLOC PRECAST CONCRETE PAVER 2 3/8" (60 mm) THICK MIN.
- B. SAND JOINT FILL
- C. SAND SETTING BED (CONCRETE SAND) 1" (25 mm)
- D. GEOTEXTILE 12" (300 mm) WIDE
- E. EXTRA WIDTH EQUAL TO FOUNDATION THICKNESS
- F. LAWN
- G. TECHO-BLOC BOREALIS EDGE
- H. PLASTIC EDGE
- I. NAIL
- J. COMPACTED GRANULAR BASE 0-3/4" (0-20 mm)
- K. GEOTEXTILE
- L. SUBGRADE

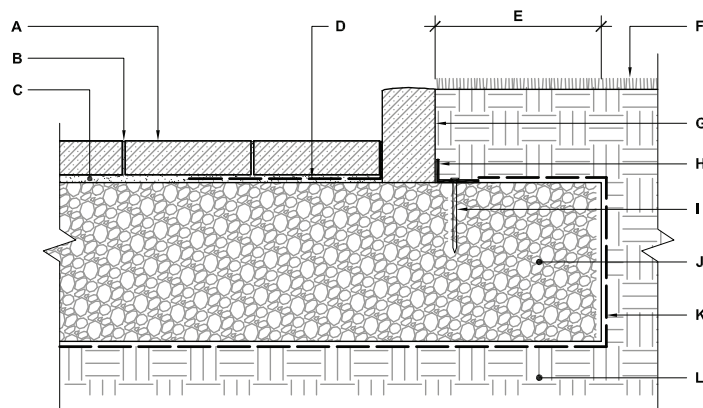


TYPICAL PAVER CROSS SECTION WITH BRANDON EDGE

- A. TECHO-BLOC PRECAST CONCRETE PAVER 2 3/8" (60 mm) THICK MIN.
- B. SAND JOINT FILL
- C. SAND SETTING BED (CONCRETE SAND) 1" (25 mm)
- D. GEOTEXTILE 12" (300 mm) WIDE
- E. EXTRA WIDTH EQUAL TO FOUNDATION THICKNESS
- F. LAWN
- G. TECHO-BLOC BRANDON EDGE
- H. PLASTIC EDGE
- I. NAIL
- J. COMPACTED GRANULAR BASE 0-3/4" (0-20 mm)
- K. GEOTEXTILE
- L. SUBGRADE


INSTALLATION GUIDE

INTERLOCKING CONCRETE PAVEMENT

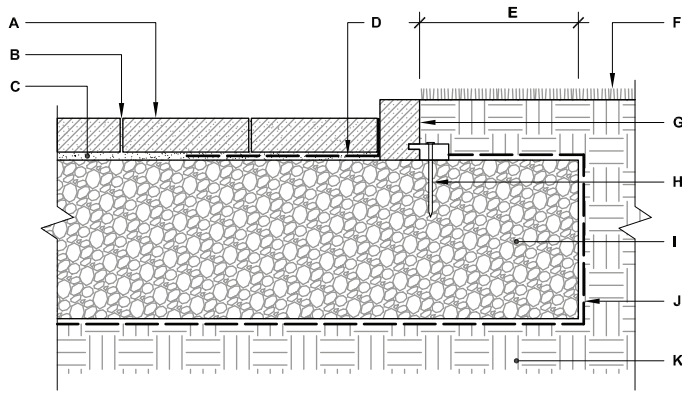


TYPICAL PAVER CROSS SECTION WITH PIETRA EDGE

- A. TECO-BLOC PRECAST CONCRETE PAVER 2 3/8" (60 mm) THICK MIN.
- B. SAND JOINT FILL
- C. SAND SETTING BED (CONCRETE SAND) 1" (25 mm)
- D. GEOTEXTILE 12" (300 mm) WIDE
- E. EXTRA WIDTH EQUAL TO FOUNDATION THICKNESS
- F. LAWN
- G. TECO-BLOC PIETRA EDGE
- H. NAIL
- I. COMPACTED GRANULAR BASE 0-3/4" (0-20 mm)
- J. GEOTEXTILE
- K. SUBGRADE

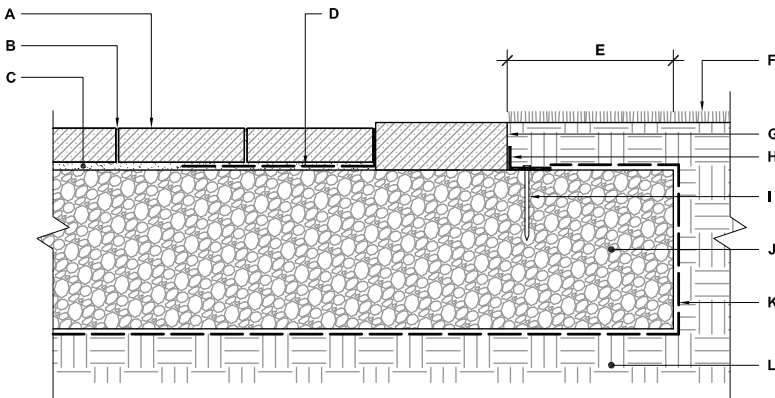

TYPICAL PAVER CROSS SECTION WITH RAFFINATO 90 MM EDGE

- A. TECO-BLOC PRECAST CONCRETE PAVER 2 3/8" (60 mm) THICK MIN.
- B. SAND JOINT FILL
- C. SAND SETTING BED (CONCRETE SAND) 1" (25 mm)
- D. GEOTEXTILE 12" (300 mm) WIDE
- E. EXTRA WIDTH EQUAL TO FOUNDATION THICKNESS
- F. LAWN
- G. TECO-BLOC RAFFINATO 90 mm EDGE
- H. PLASTIC EDGE
- I. NAIL
- J. COMPACTED GRANULAR BASE 0-3/4" (0-20 mm)
- K. GEOTEXTILE
- L. SUBGRADE

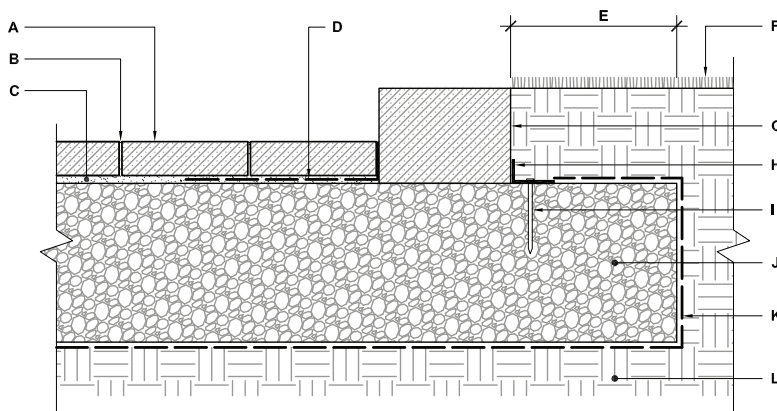


TYPICAL PAVER CROSS SECTION WITH RAFFINATO 180 MM EDGE

- A. TECO-BLOC PRECAST CONCRETE PAVER 2 3/8" (60 mm) THICK MIN.
- B. SAND JOINT FILL
- C. SAND SETTING BED (CONCRETE SAND) 1" (25 mm)
- D. GEOTEXTILE 12" (300 mm) WIDE
- E. EXTRA WIDTH EQUAL TO FOUNDATION THICKNESS
- F. LAWN
- G. TECO-BLOC RAFFINATO 180 mm EDGE
- H. PLASTIC EDGE
- I. NAIL
- J. COMPACTED GRANULAR BASE 0-3/4" (0-20 mm)
- K. GEOTEXTILE
- L. SUBGRADE


INSTALLATION GUIDE

INTERLOCKING CONCRETE PAVEMENT

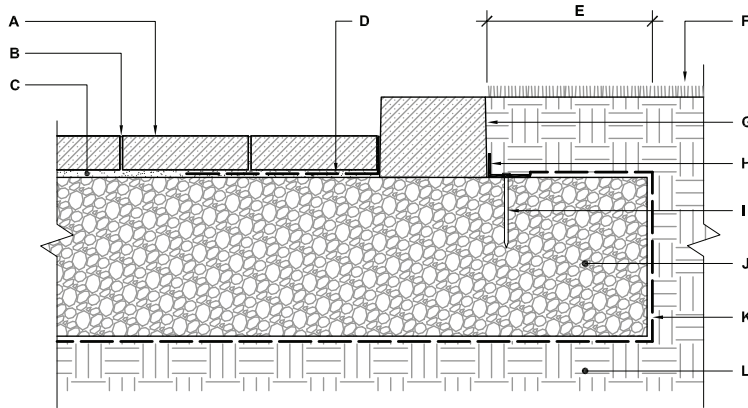

- A. TECHO-BLOC PRECAST CONCRETE PAVER 2 3/8" (60 mm) THICK MIN.
- B. SAND JOINT FILL
- C. SAND SETTING BED (CONCRETE SAND) 1" (25 mm)
- D. GEOTEXTILE 12" (300 mm) WIDE
- E. EXTRA WIDTH EQUAL TO FOUNDATION THICKNESS
- F. LAWN
- G. TECHO-BLOC RÖCKA EDGE
- H. PLASTIC EDGE
- I. NAIL
- J. COMPACTED GRANULAR BASE 0-3/4" (0-20 mm)
- K. GEOTEXTILE
- L. SUBGRADE

TYPICAL PAVER CROSS SECTION WITH RÖCKA EDGE

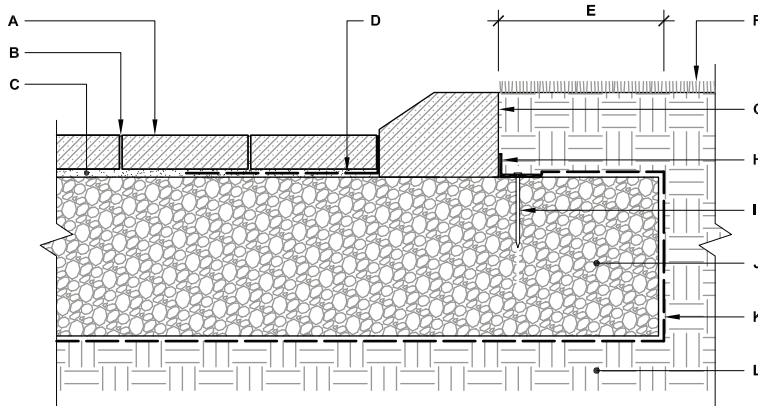

- A. TECHO-BLOC PRECAST CONCRETE PAVER 2 3/8" (60 mm) THICK MIN.
- B. SAND JOINT FILL
- C. SAND SETTING BED (CONCRETE SAND) 1" (25 mm)
- D. GEOTEXTILE 12" (300 mm) WIDE
- E. EXTRA WIDTH EQUAL TO FOUNDATION THICKNESS
- F. LAWN
- G. TECHO-BLOC TUNDRA EDGE
- H. PLASTIC EDGE
- I. NAIL
- J. COMPACTED GRANULAR BASE 0-3/4" (0-20 mm)
- K. GEOTEXTILE
- L. SUBGRADE

TYPICAL PAVER CROSS SECTION WITH TUNDRA EDGE